
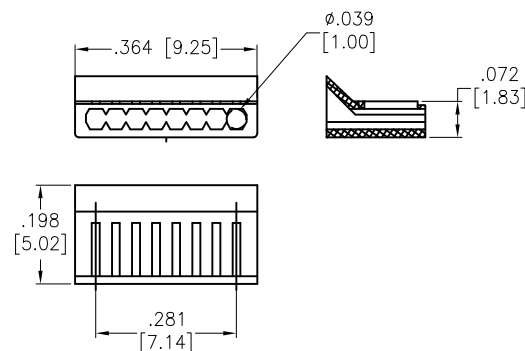
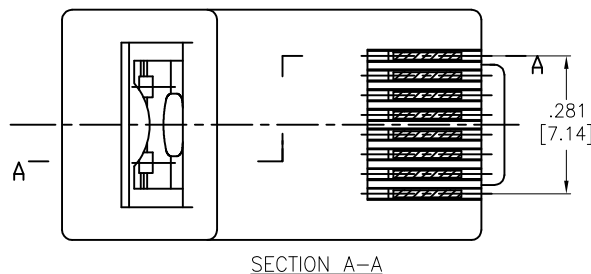

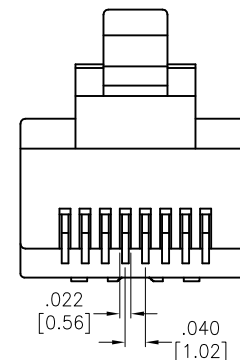
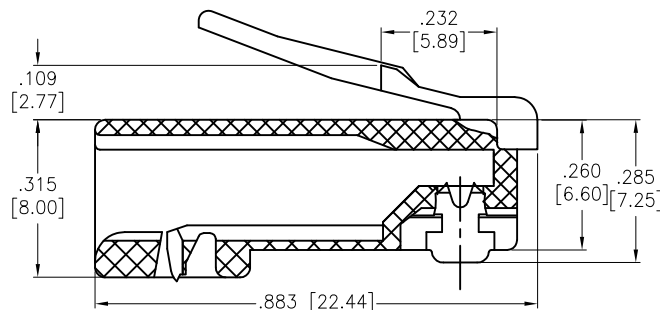


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	05/17/12	
A		UPDATE DRAWING	7/29/21	WX/RC

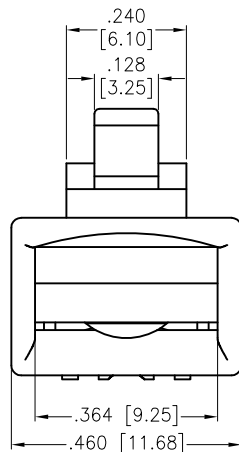

SPECIFICATIONS:

Material:

Insulator: PC, rated UL 94V-2

Insulator color: Clear

Contacts: Phosphor Bronze

Plating:

Gold over Nickel underplate overall.

(See chart for thickness)

Electrical:

Voltage rating: 150 VAC RMS

Current rating: 1.5 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1.000V AC/DC PEAK @0.5mA 50 or 60Hz 1Minute

Temperature Rating:

Operating temperature: -25°C to +55°C

Environmental:

Lead free, RoHS compliant



"X"	GOLD PLATING
U	15 µin
W	30 µin
G	50 µin

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	TW	05/17/12
CHECKED	NP	05/17/12
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH



TITLE
 MODULAR TELEPHONE PLUG, 8P8C
 CAT.6, LOAD BAR

SIZE X	PART NO. MTPR-88-X-C6-LB	REV. A
REF: S00005C	SCALE: NTS	SHEET 1 OF 1