

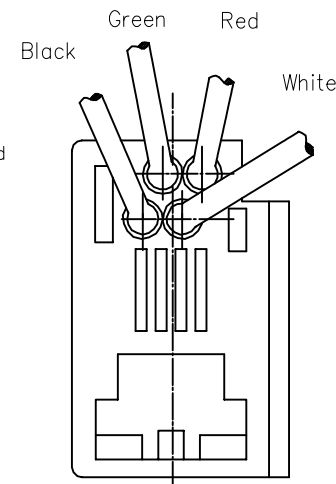
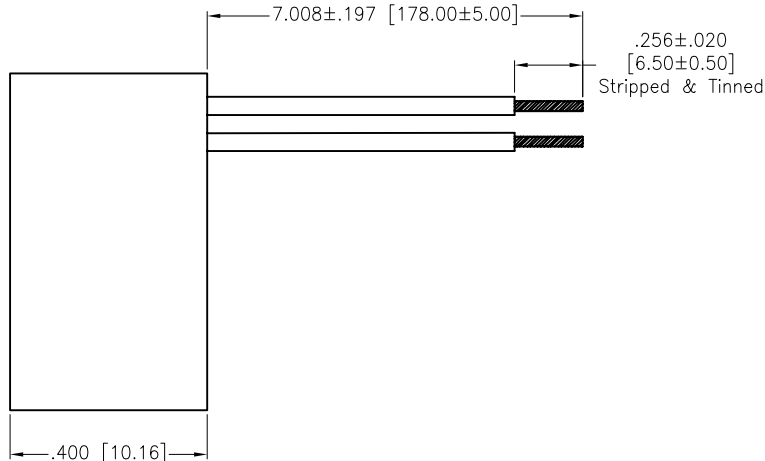


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/16/09	
A		UPDATE DRAWING	8/15/18	AYTY

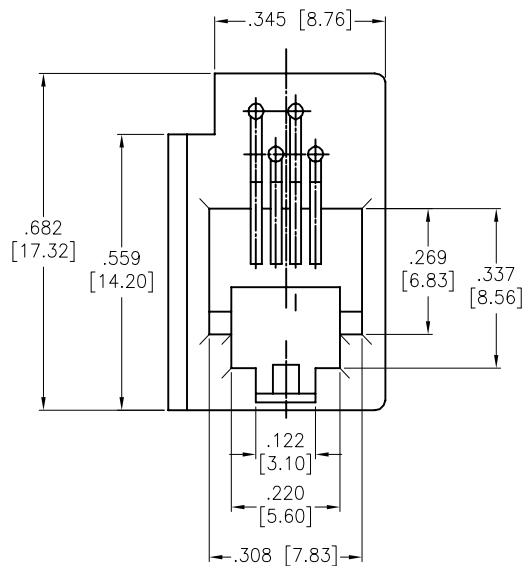

SPECIFICATIONS:

Material:
 Insulator: ABS, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Wire: 26 Awg, UL 1061
 Plating:
 Gold over Nickel underplate on mating area
 Electrical:
 Voltage rating: 125 VAC max
 Current rating: 1.5 Amp
 Contact resistance: 30 mohms max
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC or 1,500 VDC for 1 minute
 Temperature Rating:
 Operating temperature: 0°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



X	PLATING
0	15 μin Gold
1	30 μin Gold
2	50 μin Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010
APPROVALS		DATE	
DRAWN	DY	6/16/09	
CHECKED			
APPROVED			



TITLE: WIRE LEADED TELEPHONE JACK, 616E,
 4P4C, 26AWG, STRIPPED, COLOR BLACK

SIZE X	PART NO. MTJP-616E-X-A1-1	REV. A
REF: S00005C	SCALE: NTS	SHEET 1 OF 1