

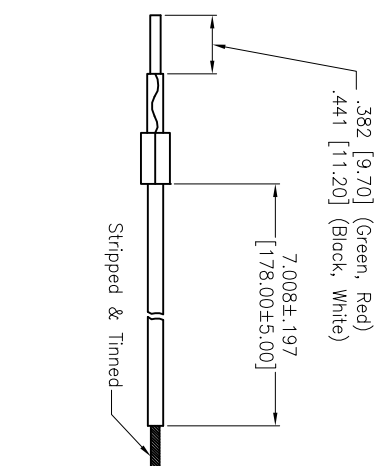
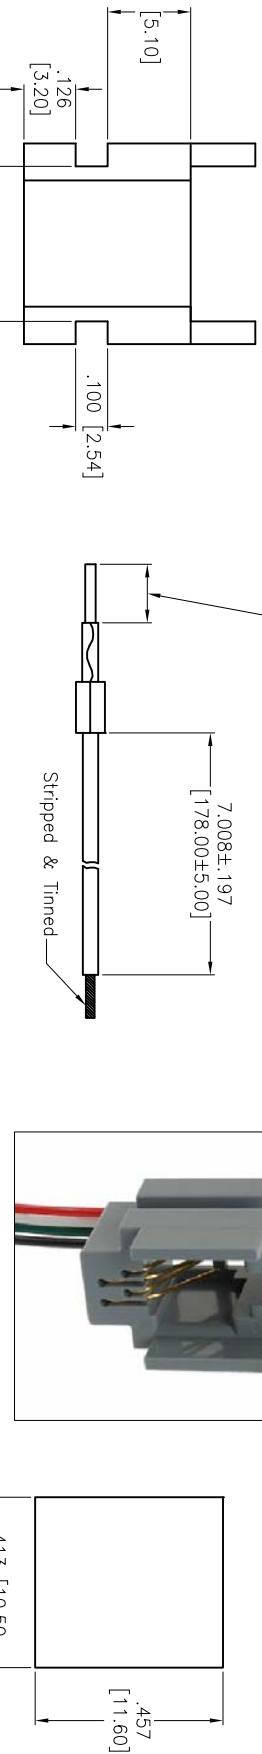


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/20/04	
A		UPDATED DRAWING	4/22/15	HR/LL

APPROVED: _____ TITLE: _____
 DATE: _____

THIS IS A CUSTOM CABLE PRODUCT THAT IS NON-CANCELABLE / NON-RETURNABLE

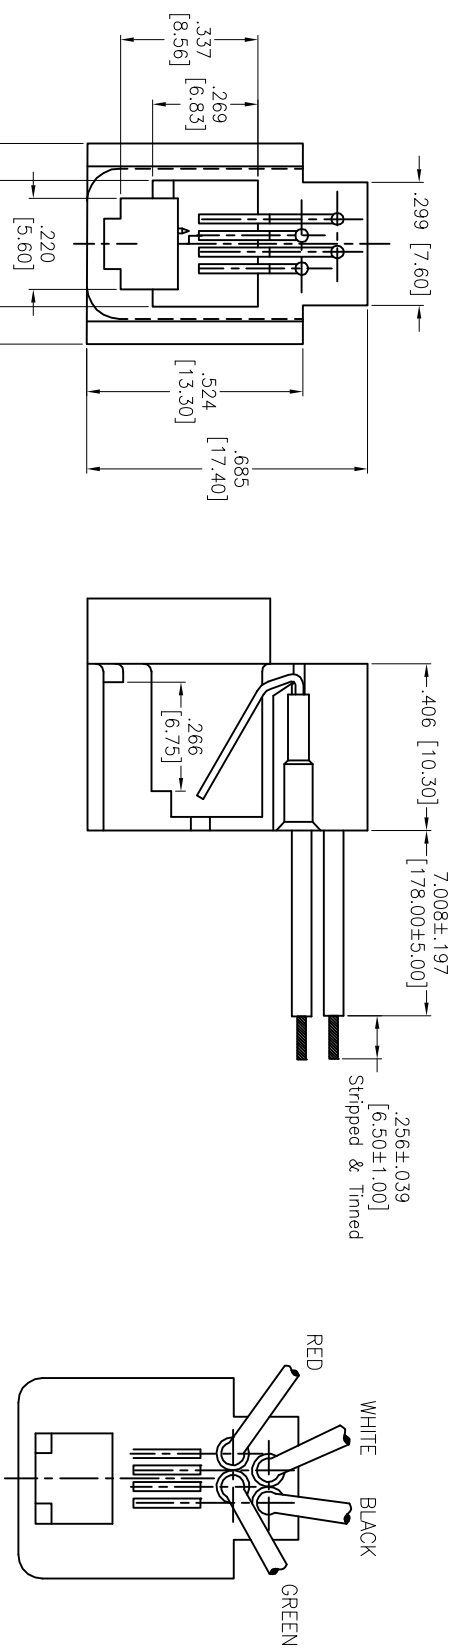

SPECIFICATIONS:

- Material: Insulator: ABS, rated UL 94V-0
- Insulator color: Gray
- Contacts: Phosphor Bronze
- Wire: 26AWG, UL1061
- Plating: Gold over Nickel underplate on mating area.
- Electrical: Operating voltage: 125 VAC max
- Current rating: 1.5 Amps max
- Contact resistance: 30 mohms max
- Insulation resistance: 1,000 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 1,000 VAC or 1,500 VDC for 1 minute
- Environmental: Operating temperature: -0°C to +70°C
- Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLE SIZES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ETABEE

WIRE LEADED PHONE JACK, TYPE 616M,
7" WIRE LEADS, STRIPED 1/4" AND TINNED

TITLE: WIRE LEADED PHONE JACK, TYPE 616M,
7" WIRE LEADS, STRIPED 1/4" AND TINNED

SIZE: X PART NO.: MTJP-616M-X-A1-2

REF: S00005C SCALE: NTS SHEET 1 OF 1