


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/10	
A		UPDATE DRAWING	1/28/21	LH/KL

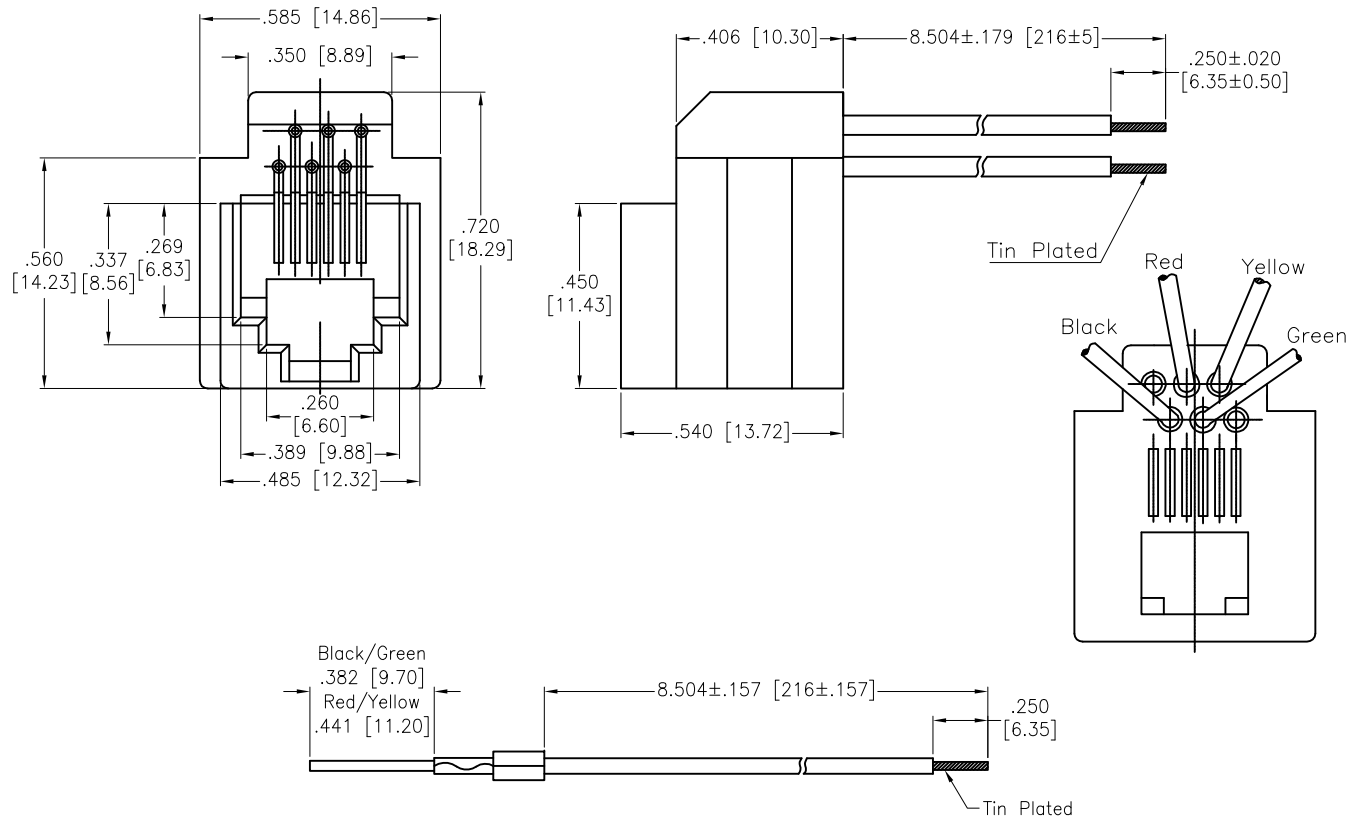

SPECIFICATIONS:

Material:
 Insulator: ABS, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Wires: 26 Awg, UL 1061

Plating:
 Gold over Nickel underplate on contact area.

Electrical:
 Voltage rating: 125 VAC max
 Current rating: 1.5 Amp
 Contact resistance: 20 mohms
 Insulation resistance: 1000 Mohms min @500 VDC
 Dielectric withstanding voltage: 1000 VAC or 1500 VDC for 1 minute

Temperature Rating:
 Operating temperature: -0°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X ± .10	ØX ± .10		
.XX ± .020	ØXX ± .015		
.XXX ± .015	ØXXX ± .010		



TITLE
 WIRE LEADED JACK, 623 K4, BLACK
 8.5" LEADS, STRIPPED AND TINNED .250"

APPROVALS		DATE
DRAWN	DY	5/25/10
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	MTJP-623-K4-X-B1-1	A
REF: S00005C	SCALE: NTS	SHEET 1 OF 1