



Rev	AWO #	Description	Date	Appr
-	5002	RELEASED	05/25/05	

APPROVED: _____
 DATE: _____ TITLE: _____

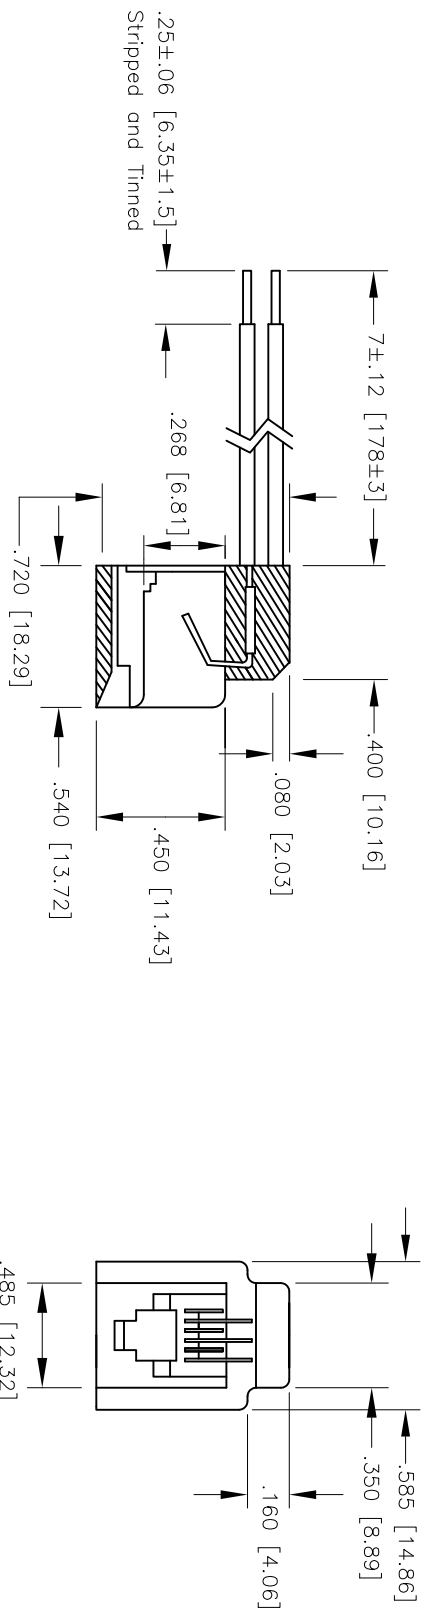

"X"	PLATING
0	15 μ " Gold
1	30 μ " Gold
2	50 μ " Gold



SPECIFICATIONS:

Material: Insulator: ABS, rated UL 94V-0
 Insulator color: Medium Gray
 Contacts: Phosphor Bronze
 Wires: 26 Awg, UL 1061, 80°C, VW-1, 300V
Plating: Gold over Nickel underplate on contact area.
 (See chart for thickness)

Electrical:

Operating voltage: 150 VAC max
 Current rating: 1.5 Amps max
 Contact resistance: 20 mohms
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +125°C
 Environmental: Lead free, RoHS compliant.



TITLE: WIRE LEADED JACK, 623 K6, GRAY
 7" LEADS, STRIPPED AND TINNED, .250"

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXXX ± .010
APPROVALS	DATE
DRAWN SS	6/19/06
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	MT JP-623-K6-X-A1-2	
REF:	SCALE: NTS	SHEET 1 OF 1