

6

5

4

3



2

1



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/10/12	

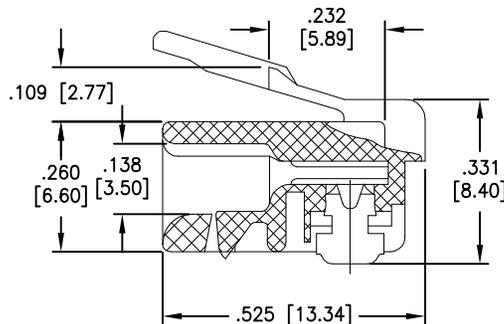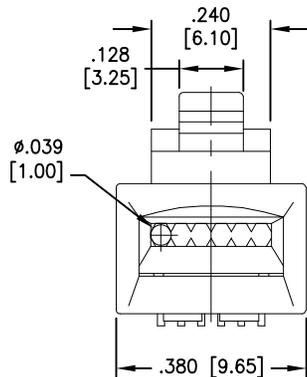

SECTION A-A

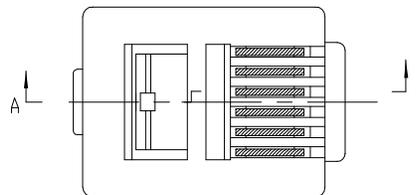

" X "	PLATING
U	15 μin Gold
W	30 μin Gold
G	50 μin Gold

SPECIFICATIONS:

Material:

Insulator: Polycarbonate, rated UL 94V-0

Insulator color: Clear

Contacts: Phosphor Bronze

Plating:

Gold over Nickel underplate overall

See chart for thickness

Electrical:

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	∅.X ± .10
.XX ± .020	∅.XX ± .015
.XXX ± .015	∅.XXX ± .010



TITLE			
MODULAR TELEPHONE PLUG, 6P6C			
SIZE	PART NO.	REV.	
X	MTPR-66-X	-	
REF:	S00005C	SCALE:	NTS
		SHEET 1 OF 1	

APPROVALS		DATE
DRAWN	AY	9/10/12
CHECKED	AL	9/10/12
APPROVED		

6

5

4

3

2

1