
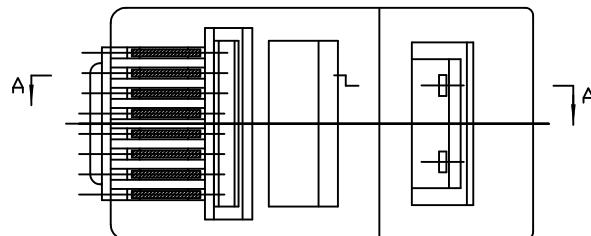
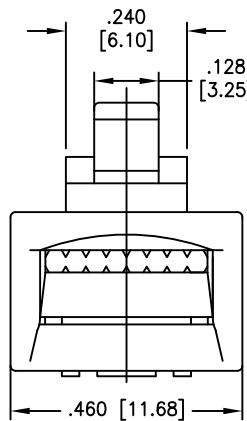
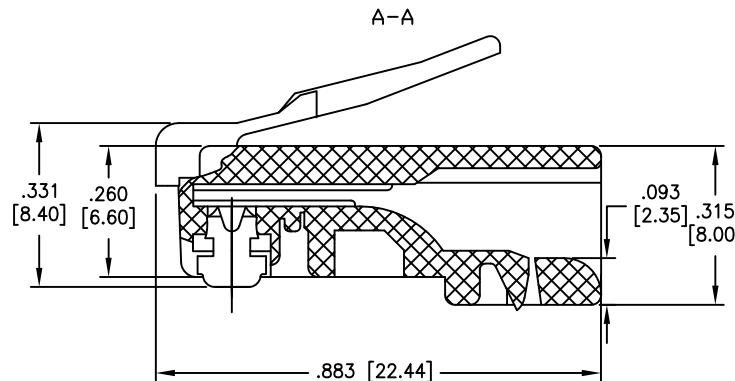


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/27/10	

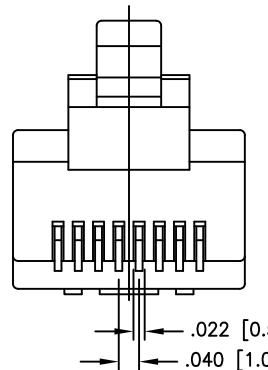

"X"	GOLD PLATING
U	15 μ in
W	30 μ in
G	50 μ in

REPLACE "X" IN PART NUMBER
WITH GOLD THICKNESS DESIGNATOR Reference.

SPECIFICATIONS:

Material:

Insulator: Polycarbonate, rated UL 94V-0

Insulator color: Clear

Contacts: Phosphor Bronze

Plating:

Gold over Nickel underplate overall, See chart for thickness

Electrical:

Operating voltage: 150 VAC max

Current rating: 1.5 Amps max

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant.

ROHS
COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X \pm .10 \emptyset X \pm .10
.XX \pm .020 \emptyset XX \pm .015
.XXX \pm .015 \emptyset XXX \pm .010

APPROVALS		DATE
DRAWN	AY	9/27/10
CHECKED	VW	9/27/10
APPROVED		
REF: S00005C	SCALE: NTS	SHEET 1 OF 1

METABEE

TITLE

MODULAR TELEPHONE PLUG, 8P8C, CAT5e

SIZE X PART NO. MTPR-88-X REV. -