

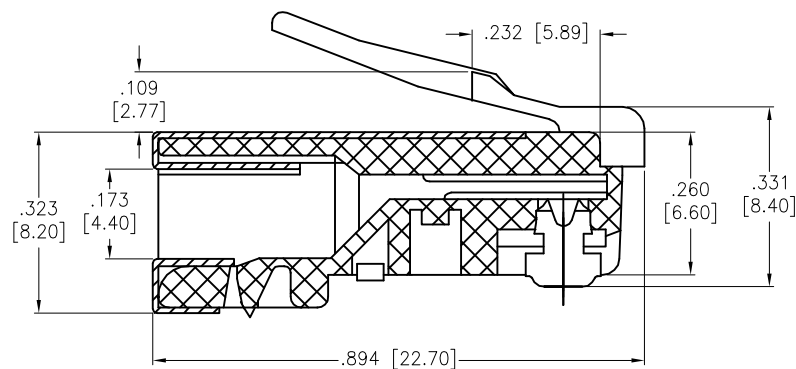
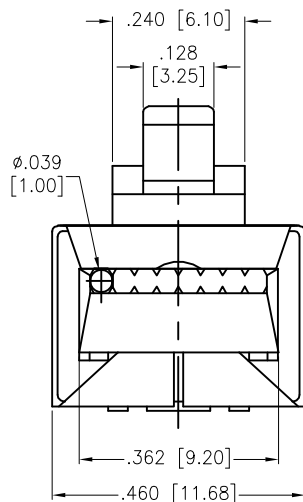


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/08	
A		REVISED SPEC. & SHAPE	6/6/14	HR/MW

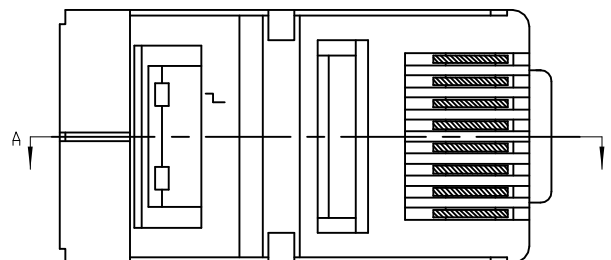

SECTION A-A

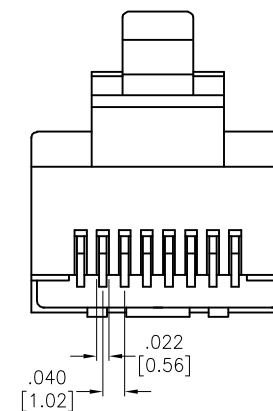

"X"	PLATING
U	15 µin Gold
W	30 µin Gold
G	50 µin Gold

SPECIFICATIONS:

Material:
 Insulator: Polycarbonate, rated UL 94V-0
 Insulator color: Clear
 Contacts: Copper Alloy
 Shell: Brass
 Plating:
 Gold over Nickel underplate overall, See chart for thickness
 Electrical:
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010				
APPROVALS		DATE		TITLE
DRAWN	SS	1/28/08		MODULAR TELEPHONE PLUG, 8P8C
CHECKED				EMI, CAT5e
APPROVED				
SIZE	PART NO.		REV.	
X	MTP-88-X-EMI		A	
REF:	S00005C	SCALE:	NTS	SHEET 1 OF 1