

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/13/18	

D

C

B


A

D

C

B

A

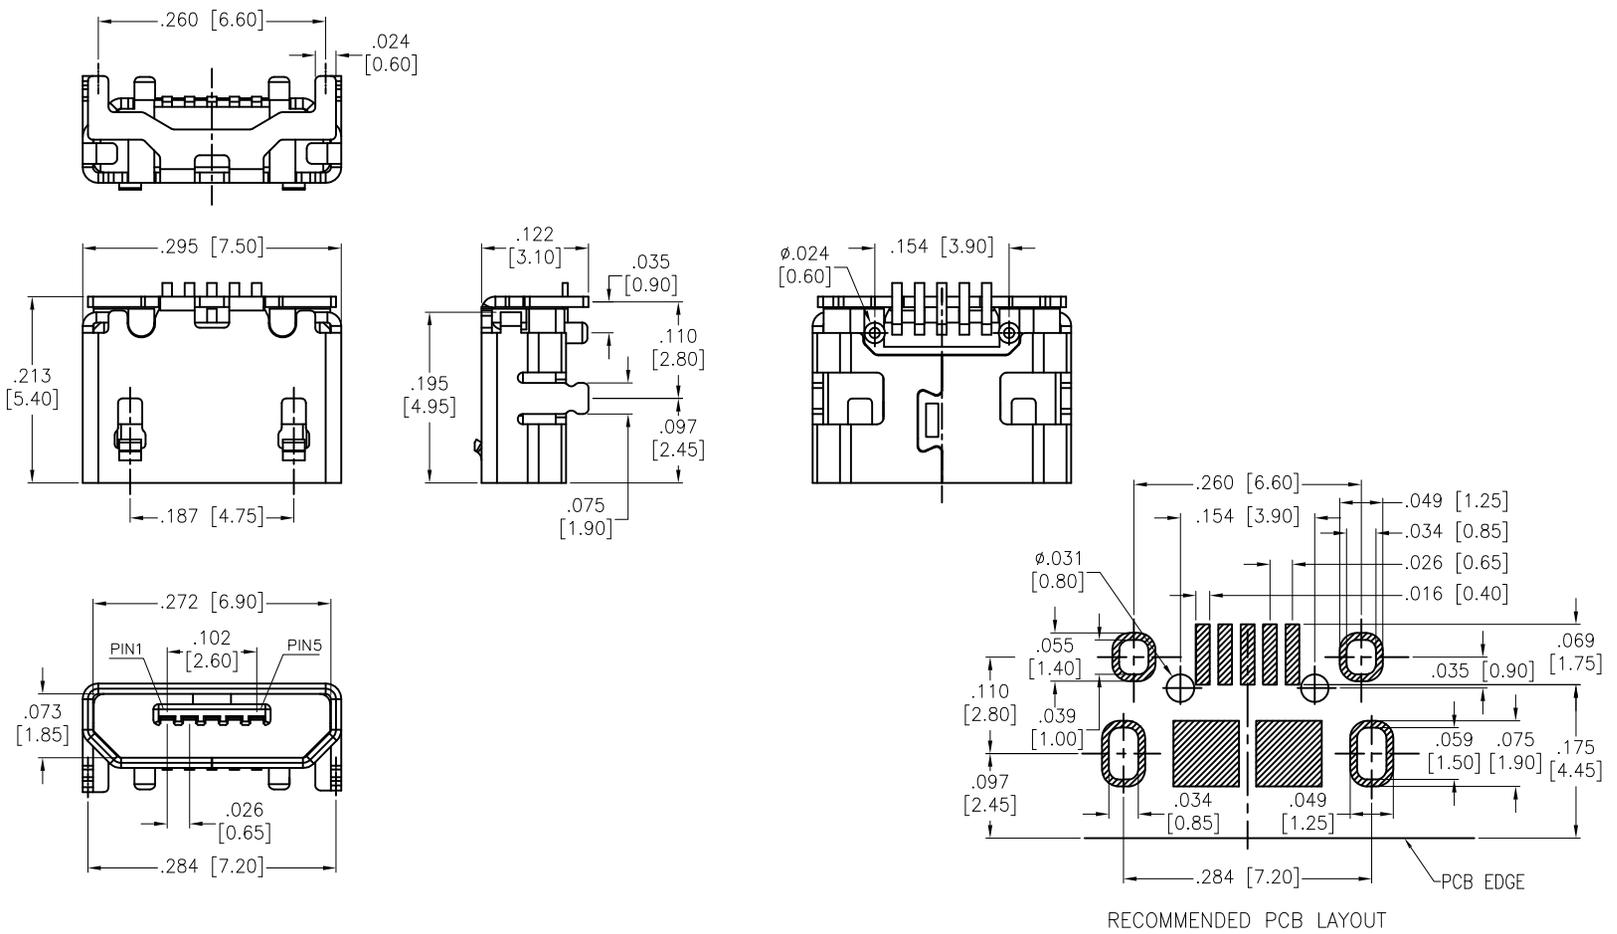

SPECIFICATIONS:
 Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Stainless Steel
 Plating:
 Gold flash over Nickel underplate on contact area
 Electrical:
 Current rating: 1 A max
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 100 VAC for 1 minute
 Temperature Rating:
 Temperature range: -30°C to +80°C
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
.X ± .10	Ø.X ± .10	
.XX ± .020	Ø.XX ± .015	
.XXX ± .015	Ø.XXX ± .010	
APPROVALS		DATE
DRAWN	HR	3/13/18
CHECKED	RC1	3/13/18
APPROVED		

TITLE: MICRO USB, TYPE B, SINGLE PORT,
 SOCKET, RIGHT ANGLE, SMT TYPE

SIZE	PART NO.	REV.
X	MCR-B-S-RA-SMT-CS14-T/R	-
REF:	S00097C	SCALE: NTS
		SHEET 1 OF 1

6

5

4

3

2

1

6

5

4

3

2

1