
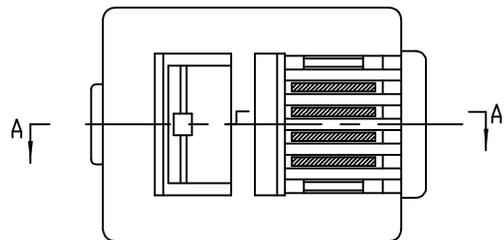
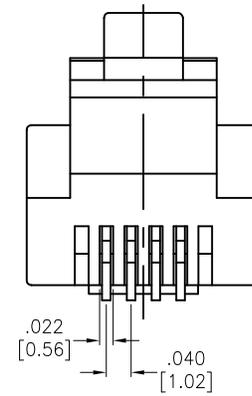
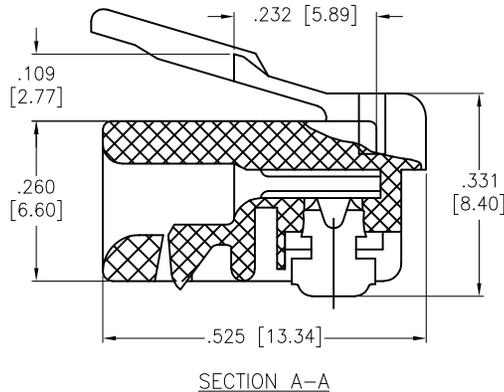


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/1/04	
A		REDRAWN	11/27/13	AY/SC
B		UPDATED DRAWING	3/23/17	HR/NC

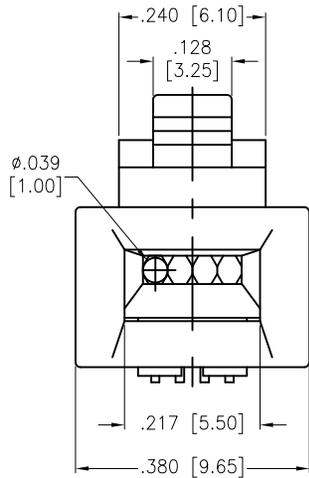

"X"	PLATING
X	Gold flash
U	15 µin
W	30 µin
G	50 µin

SPECIFICATIONS:

Material:
 Insulator: Polycarbonate, rated UL 94V-0
 Insulator color: Clear
 Contacts: Copper Alloy
 Plating:
 Gold over Nickel underplate on contact area
 Electrical:
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	SS	12/1/04	
CHECKED			
APPROVED			



TITLE
 MODULAR TELEPHONE PLUG, 6P4C
 STANDARD OVAL WIRE TYPE

SIZE X	PART NO. MTP-64-X	REV. B
REF: S00005C	SCALE: NTS	SHEET 1 OF 1