
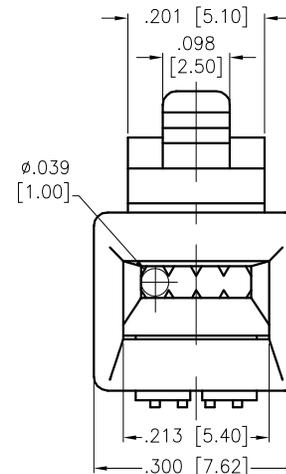
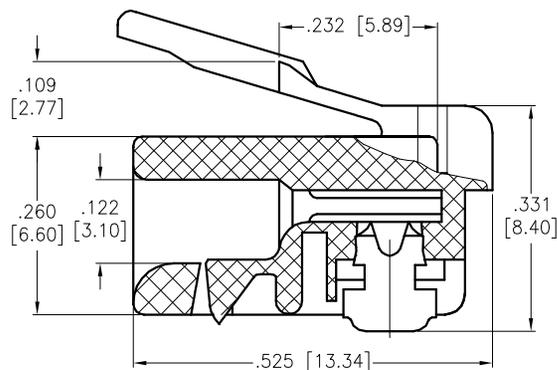
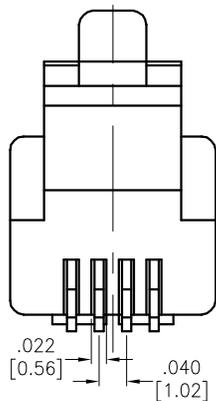


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/4/04	
A		REDRAWN	10/23/12	

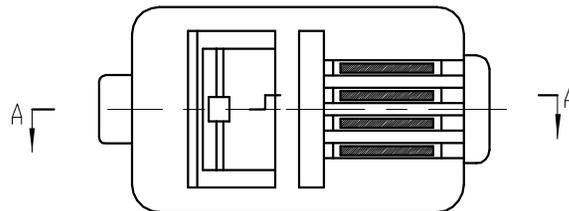

SECTION A-A

"X"	PLATING
X	Gold flash
U	15 µin Gold
W	30 µin Gold
G	50 µin Gold

SPECIFICATIONS:

Material:
 Insulator: Polycarbonate, rated UL 94V-0
 Insulator color: Clear
 Contacts: Phosphor Bronze
 Plating:
 Gold over Nickel underplate on contact area
 Electrical:
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

.X	± .10	∅X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010



TITLE: MODULAR TELEPHONE PLUG, 4P4C
 STANDARD OVAL WIRE TYPE

APPROVALS		DATE
DRAWN	SS	10/4/04
CHECKED		
APPROVED		

SIZE X	PART NO. MTP-44-X	REV. A
REF: S00005C	SCALE: NTS	SHEET 1 OF 1