

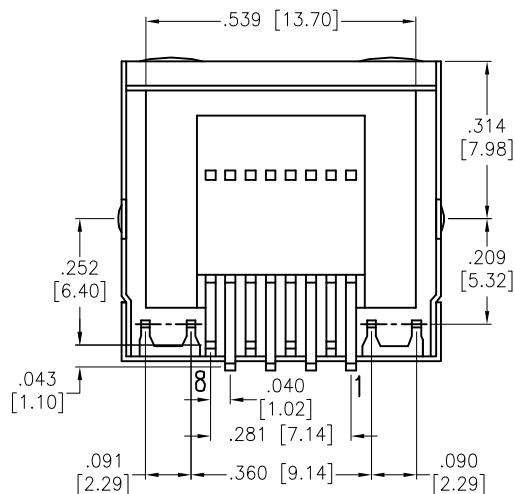
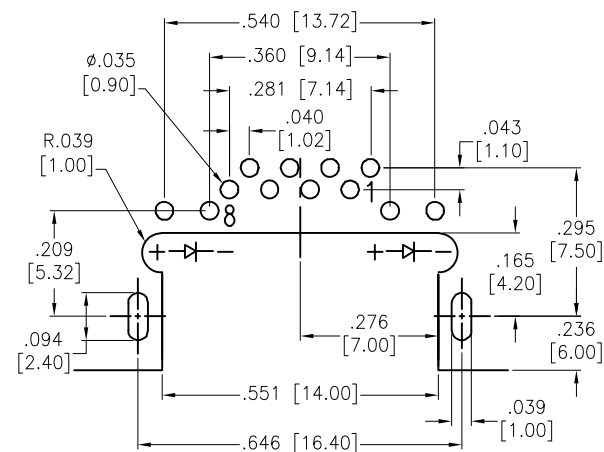
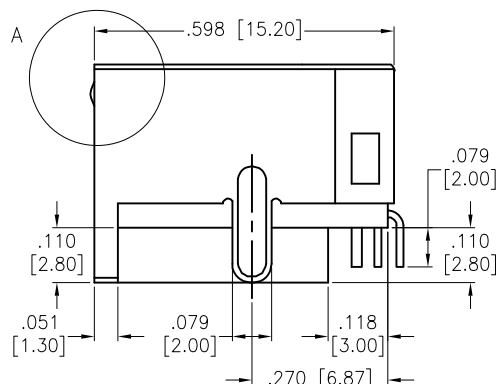


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/20/11	

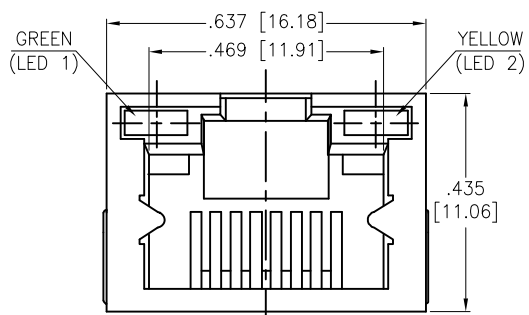

Detail A

SPECIFICATIONS:

Material:

Insulator: Nylon46, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shield: Copper Alloy, Nickel plated

Contact Plating:

Gold Flash over Nickel underplate on contact area,

Tin over Copper underplate on tails

(See chart for thickness).

Electrical:

Operating voltage: 125 VAC max

Current rating: 1.5 Amps max

Contact Resistance: 35 mohms max. initial

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minut

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.



X	PLATING
0	15 µIn Gold
1	30 µIn Gold
2	50 µIn Gold

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	TW	12/20/11
CHECKED	AY	12/20/11
APPROVED		



TITLE			
MODULAR JACK GANGED, 1 PORT, 8P8C W/LED 1 GREEN, LED2 YELLOW			
SIZE	PART NO.	REV.	
X	MTJ-88CPX1D-FS-LH-HT	-	
REF:	S00065T	SCALE:	NTS
SHEET 1 OF 1			