
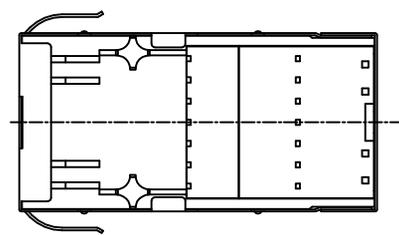
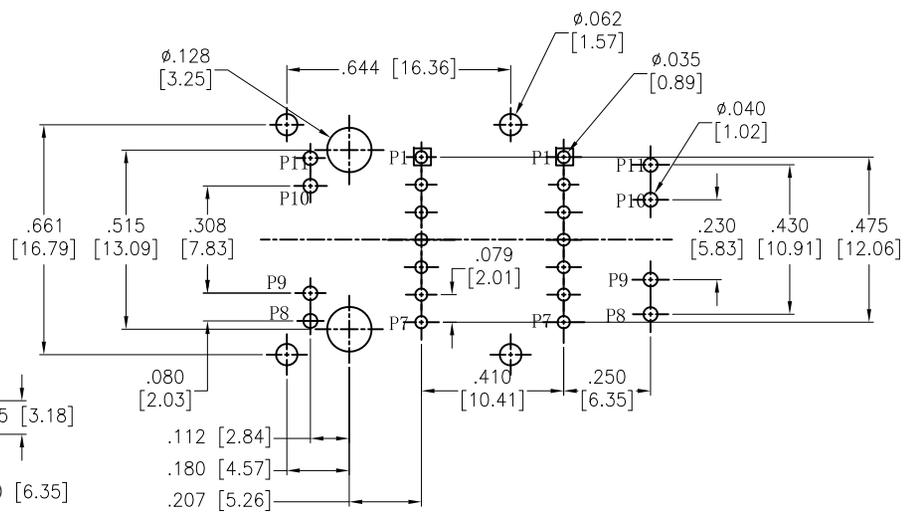


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/21/18	

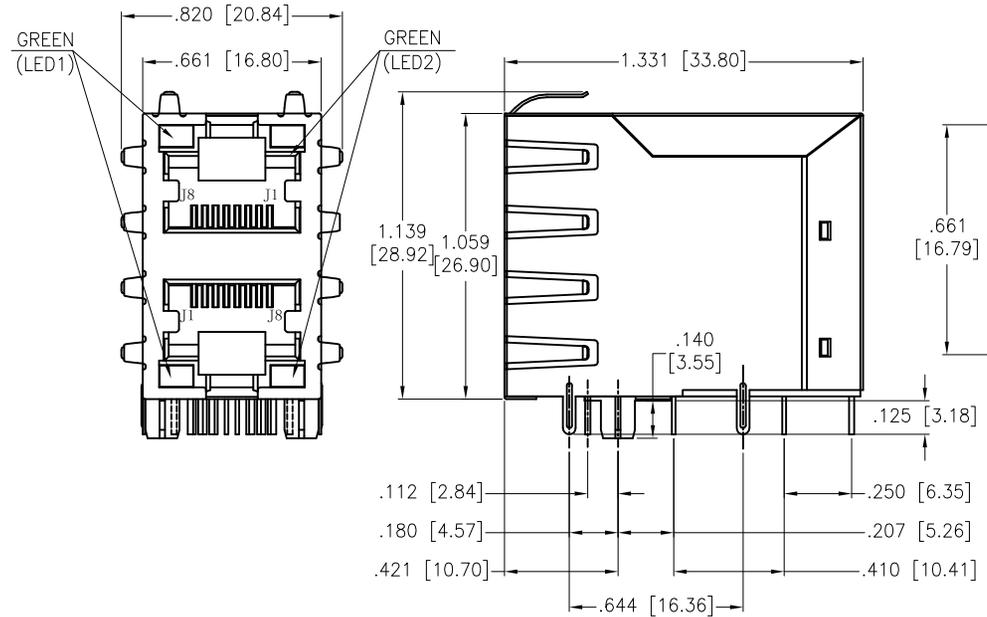

**SPECIFICATIONS:**

Material:  
 Housing: PA66, rated UL 94V-0  
 Housing Color: Black  
 Inserter: PBT, rated UL 94V-0  
 Inserter Color: Black  
 Contacts: Copper Alloy  
 Shield: Brass, Nickel plated  
 Plating:  
 Round contact  
 Gold over Nickel underplate overall  
 Flat contact  
 Gold over Nickel underplate on contact area,  
 Tin over Nickel underplate on solder tails  
 Electrical:  
 Voltage rating: 150 VAC  
 Contact Resistance: 20 mohms max  
 Insulation resistance: 500 Mohms min  
 Dielectric withstanding voltage: 1500 VAC or 2250 VDC  
 Temperature Rating:  
 Operating temperature: -40°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
.X ± .10	Ø.X ± .10	
.XX ± .020	Ø.XX ± .015	
.XXX ± .015	Ø.XXX ± .010	
APPROVALS		DATE
DRAWN	AY	6/21/18
CHECKED	LW	6/21/18
APPROVED		



TITLE MODULAR JACK GANGED, 2 PORT, 8P8C W/ LED1 GREEN, LED2 GREEN		
SIZE	PART NO.	REV.
X	MTJG-2-88QX1-FSG-PG-LD-M307C1-WOT	-
REF:	S00005C	SCALE: NTS SHEET 1 OF 2

6

5

4

3

2


1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-----	-------	-------------	------	------

SEE SHT 1 OF 2 FOR REVISION

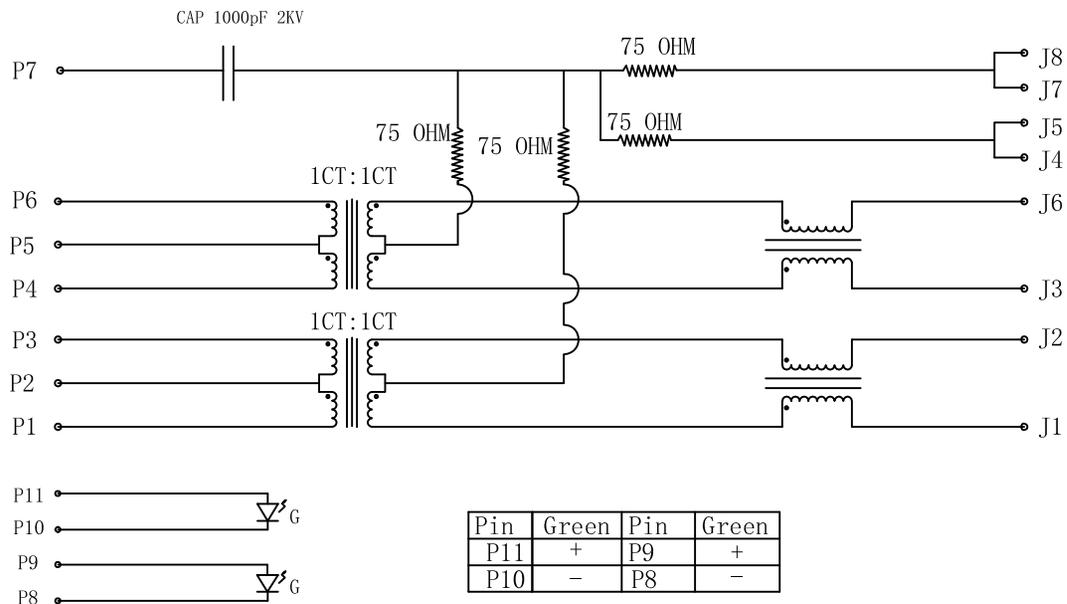

Pin	Green	Pin	Green
P11	+	P9	+
P10	-	P8	-

Electronical Specifications:

- Turn Ratio @100KHz: (P1~P3):(J1~J2) = 1:1±5%  
(P4~P6):(J3~J6) = 1:1±5%
- Primary Inductance: 350uH MIN @100KHZ,0.1V 8mA DC BIAS
- DC Resistance:(J1~J2):(J3~J6) 1.2 OHMS MAX
- Insertion Loss: 1-100MHz -1.2dB MAX
- Return Loss: 1-30MHz -16dB MIN  
30-60MHz -12dB MIN  
60-80MHz -10dB MIN
- CROSS TALK: 1-100MHz -30dB MIN
- COMMON TO COMMON MODE ATTENUATION: 1-100MHz -30dB MIN
- Isolation: PHY Side to Line Side: 1500VAC or 2250VDC

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010



APPROVALS		DATE
DRAWN	AY	6/21/18
CHECKED	LW	6/21/18
APPROVED		

TITLE MODULAR JACK GANGED, 2 PORT, 8P8C W/ LED1 GREEN, LED2 GREEN		
SIZE X	PART NO. MTJG-2-88QX1-FSG-PG-LD-M307C1-WOT	REV. -
REF: S00005C	SCALE: NTS	SHEET 2 OF 2

6

5

4

3

2

1