

6

5

4

3


2

1





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/16/18	

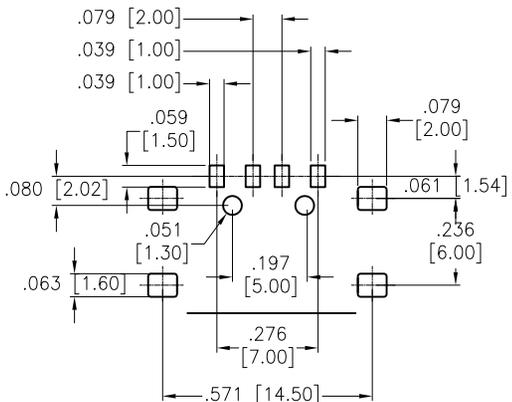

RECOMMENDED PCB LAYOUT

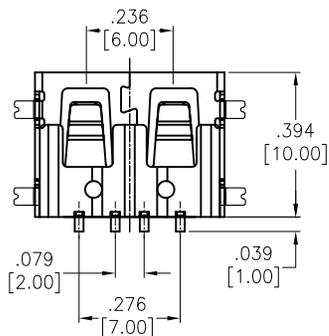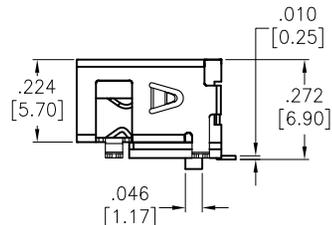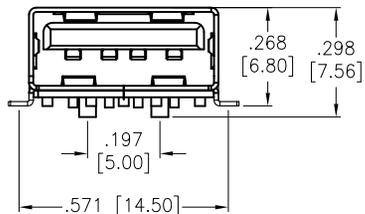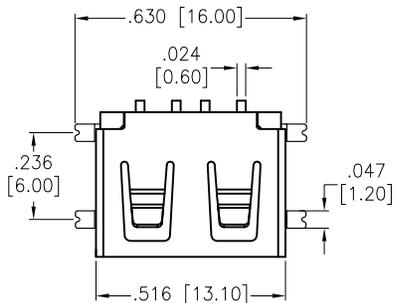

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Brass

Shell: SPCC

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on solder tails

Electrical:

Contact resistance: 30 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

.X	± .10	∅X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010



TITLE: USB TYPE A, RIGHT ANGLE, NO FLANGE
 TRUE SURFACE MOUNT

APPROVALS		DATE
DRAWN	HR	1/16/18
CHECKED	SL	1/16/18
APPROVED		

SIZE	PART NO.	REV.
X	USB-A-S-RA-TSMT-CS5-NF	-
REF: S00126T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1