

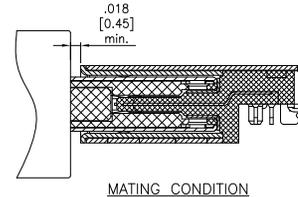
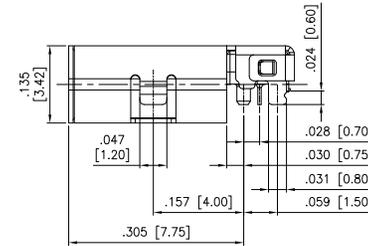
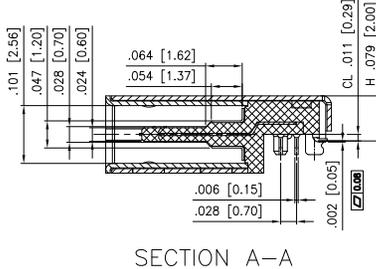
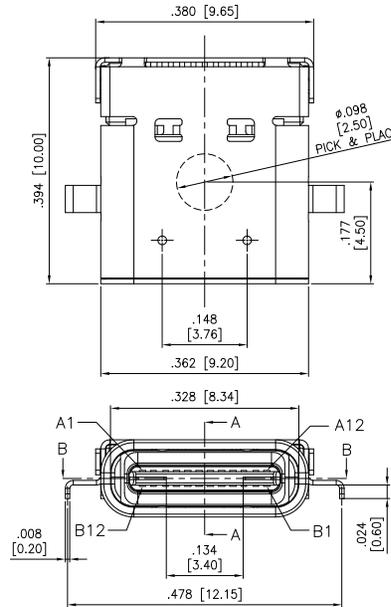
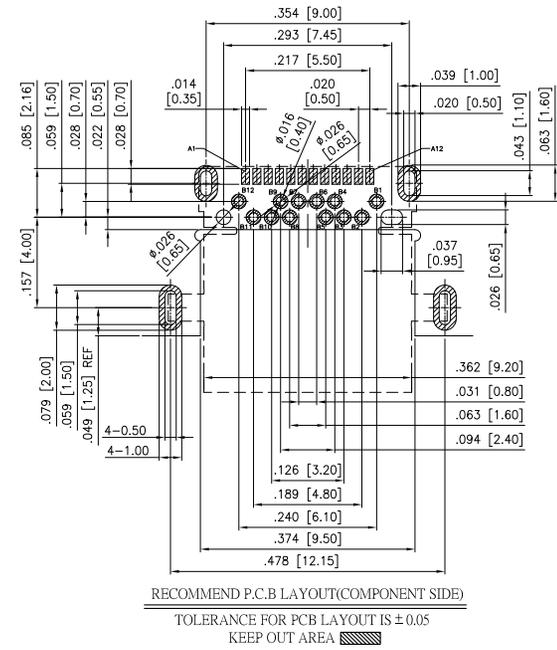
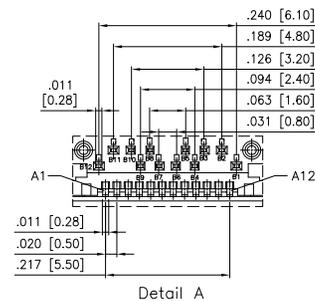


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/18/18	
A		UPDATED DRAWING	8/31/18	HR/RC1

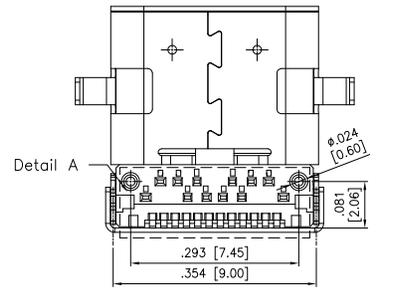

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	Vbus	First	B9	Vbus	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	Vbus	First	B4	Vbus	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	

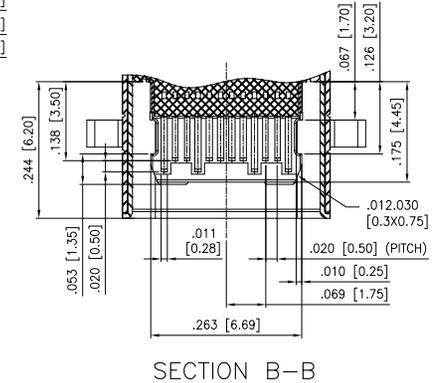

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Stainless Steel, Nickel plated
 Cover Shell: Copper Alloy, Nickel plated
 Inner ground cover shell: Stainless Steel, Nickel plated
 Mid plate: Stainless Steel, Clean
 Plating:
 Gold Flash over Nickel underplate on contact area,
 Matte Tin over Nickel underplate on solder tails.
Electrical:

Current rating: 5 A (Vbus)
 1.25 A (Vconn)
 0.25 A (Other)
 Contact resistance: 40 mohms max. (Initial)
 10 mohms max. (After test) @ 20 mV, 100 mA
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding: 100 VAC R.M.S

Mechanical:
 Insertion force: 5~20 N
 Withdrawal force: 6~20 N (After test)
 Durability: 10,000 Cycles
 Temperature Rating:
 Operating temperature: -40°C to +85°C
Environmental:
 Lead free, RoHS compliant.

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	HR	5/18/18	
CHECKED	YC	5/18/18	
APPROVED			



TITLE: UNIVERSAL SERIAL BUS, TYPE C, FEMALE,
 SMT TYPE, EDGE HANG, BLACK INSULATOR

SIZE	PART NO.	REV.
X	USB-C31-S-RA-EH2.0A-BK-T/R	-
REF:	S00296T	SCALE: NTS
SHEET 1 OF 1		