


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/28/18	
A		ADDED PACKING	1/14/20	AY/OC

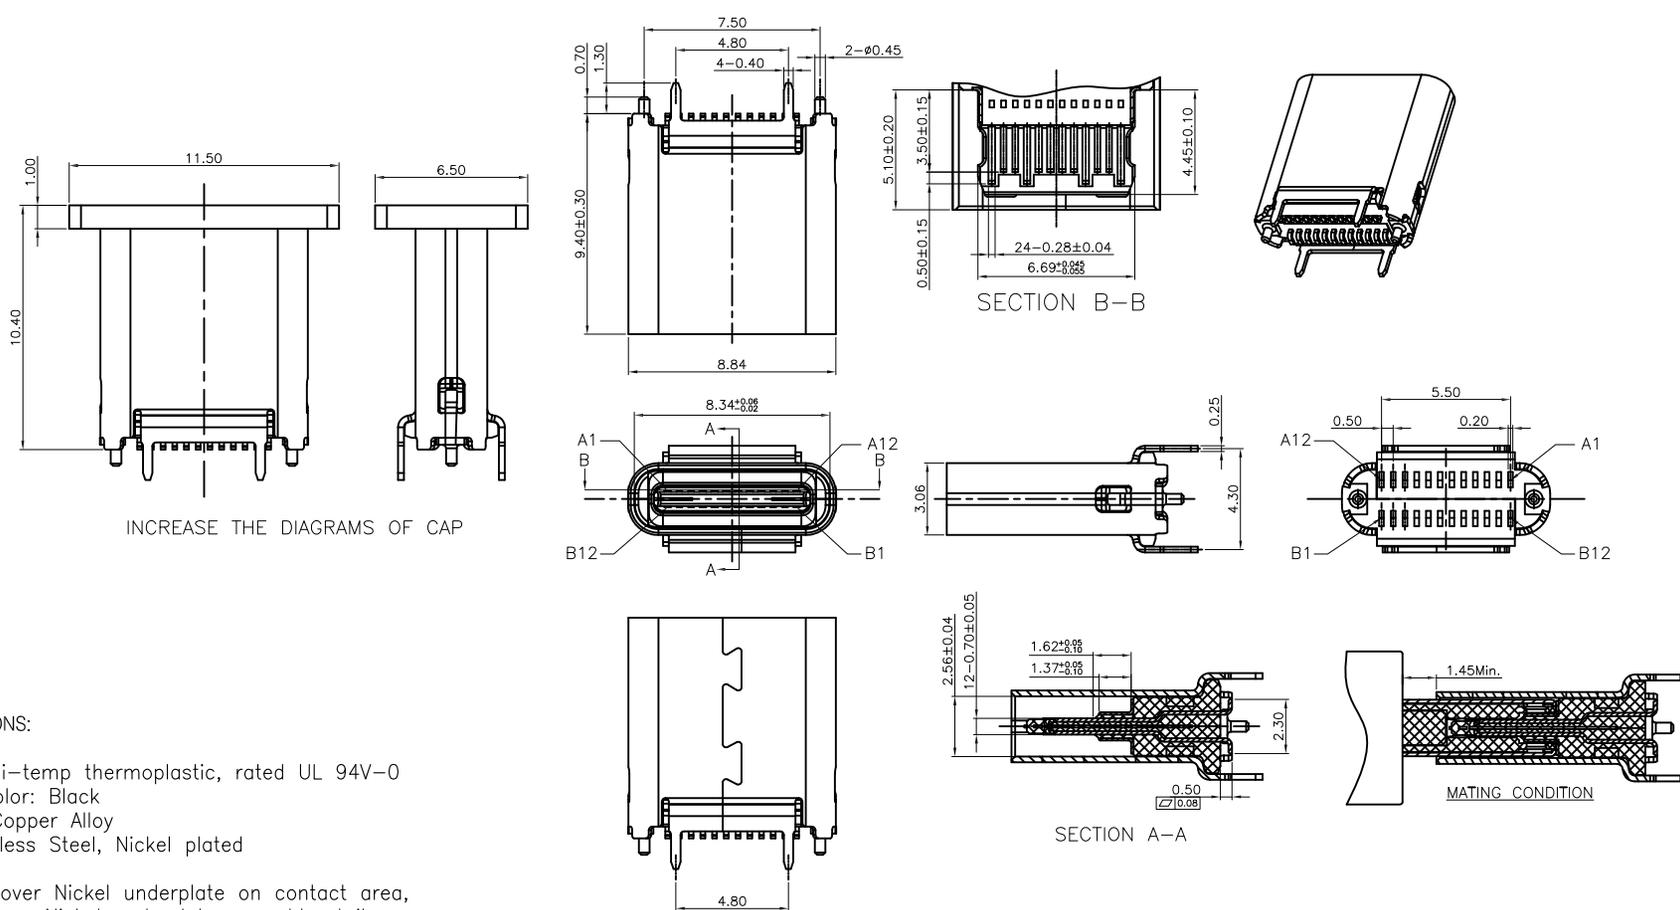

INCREASE THE DIAGRAMS OF CAP

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Stainless Steel, Nickel plated
Plating:
 Gold flash over Nickel underplate on contact area,
 Matte Tin over Nickel underplate on solder tails.
Electrical:
 Current rating: 5 A (Vbus)
 1.25 A (Vconn)
 Contact resistance: 40 mohms max. (Initial)
 10 mohms max. (After test) @ 20 mV, 100 mA
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding: 100 VAC R.M.S
Mechanical:
 Insertion force: 5~20 N
 Withdrawal force: 6~20 N (After test)
 Durability: 10,000 Cycles
 Temperature Rating:
 Operating temperature: -40°C to +85°C
Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED ANGLE			
X.	± 0.50		
.X	± 0.30	± 2'	
.XX	± 0.20		
.XXX	± 0.10		
APPROVALS		DATE	
DRAWN	AY	5/28/18	
CHECKED	LW	5/28/18	
APPROVED			
TITLE		UNIVERSAL SERIAL BUS, TYPE C 3.1, FEMALE, VERTICAL, BLACK INSULATOR, TAPE AND REEL	
SIZE	PART NO.	REV.	
X	USB-C31-S-VT-CS2A-BK-PP-T/R	A	
REF:	S00296T	SCALE:	NTS
		SHEET 1 OF 3	

6 5 4 3 2 1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 3 FOR REVISION				

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	V _{BUS}	First	B9	V _{BUS}	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	V _{BUS}	First	B4	V _{BUS}	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED ANGLE MM X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.10 ± 2'				
APPROVALS DRAWN AY CHECKED LW APPROVED			DATE 5/28/18 5/28/18	
TITLE UNIVERSAL SERIAL BUS, TYPE C 3.1, FEMALE, VERTICAL, BLACK INSULATOR, TAPE AND REEL			SIZE X PART NO. USB-C31-S-VT-CS2A-BK-PP-T/R REF: S00296T SCALE: NTS SHEET 2 OF 3	
REV. A			REV. A	

6 5 4 3 2 1

6

5

4






3

2

1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 3 FOR REVISION				

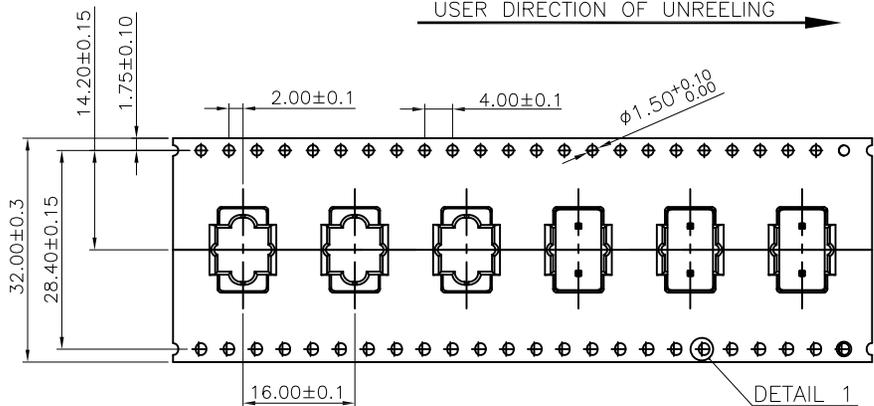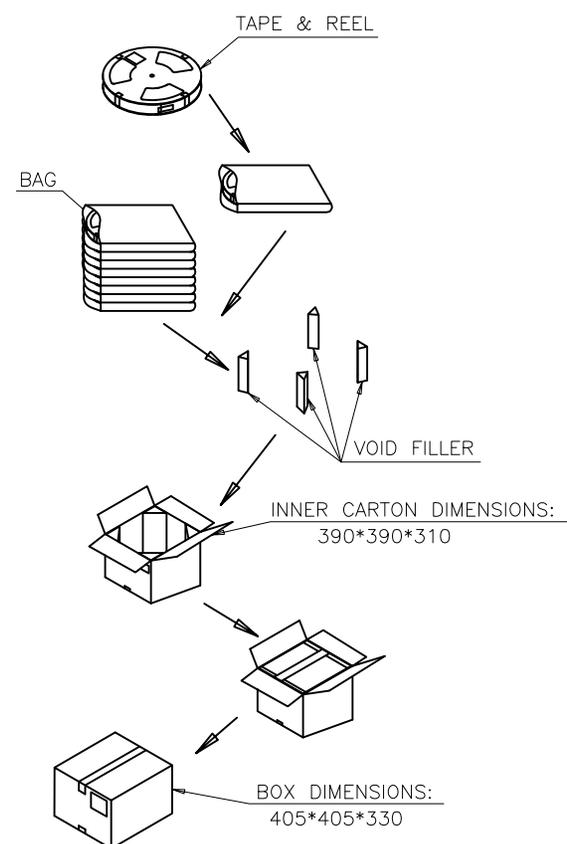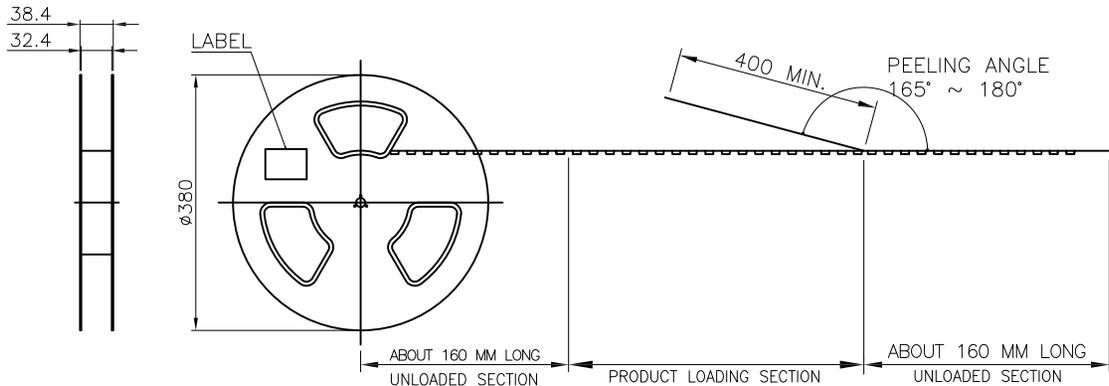

NOTE:

- 1.MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.

2.PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)

3.PEELING SPEED: 300 mm/min.

4.EACH BAG SHALL BE INCLUDED DESICCANT.

400	8	3200 PCS
PCS/ REEL	REELS/ CARTON	QUANTITY

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
ANGLE

MM
X. ± 0.20
.X ± 0.15
.XX ± 0.10
XXX ± 0.05

± 1°

APPROVALS		DATE
DRAWN	AY	5/28/18
CHECKED	LW	5/28/18
APPROVED		



TITLE
UNIVERSAL SERIAL BUS, TYPE C 3.1, FEMALE,
VERTICAL, BLACK INSULATOR, TAPE AND REEL

SIZE X	PART NO. USB-C31-S-VT-CS2A-BK-PP-T/R	REV. A
REF: S00296T	SCALE: NTS	SHEET 3 OF 3

6

5

4

3

2

1