





APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/24/22	
A		UPDATE TITTLE	4/14/23	WX
B		UPDATE TITTLE	2/27/24	LH/RC





RECOMMENDED PANEL CUT

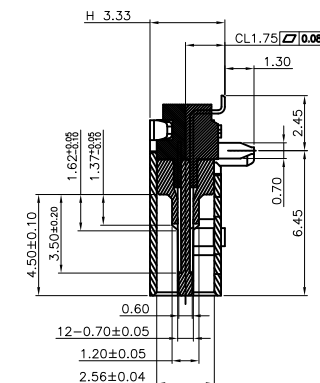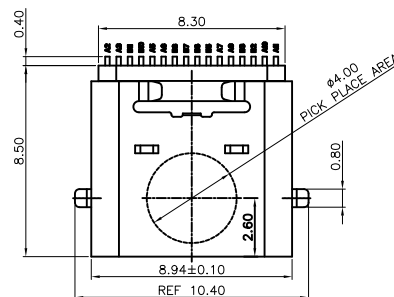


SECTION A-A

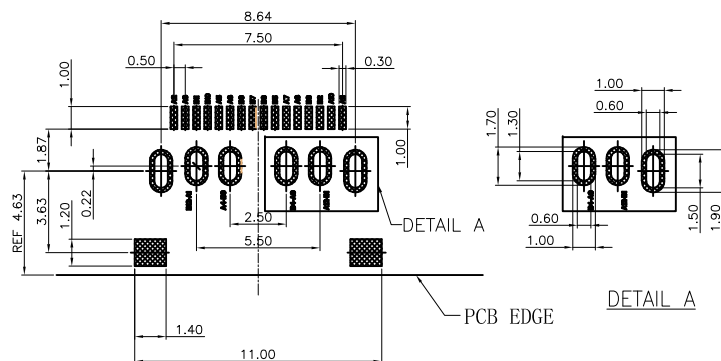

RECOMMENDED PCB LAYOUT

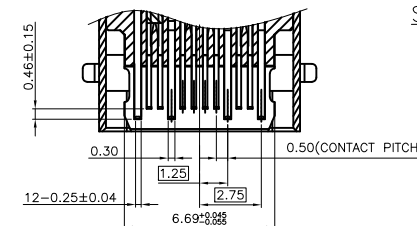

SECTION B-B



PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Shell: Stainless Steel, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Nickel underplate on solder tails

Electrical:

Current rating: 5A min for Vbus, 1.25A min for other

Contact resistance: 40 mohms max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 100 VAC R.M.S.

Mechanical:

Insertion Force: 5~20N

Withdrawal Force: 8~20N

Durability: 10,000 cycles

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

	MM	ANGLE
X	± 0.50	± 2°
.X	± 0.30	
.XX	± 0.20	
.XXX	± 0.10	

DRAWN	WX	11/24/22
CHECKED	AC1	11/24/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH



TITLE
UNIVERSAL SERIAL BUS TYPE C 4.0, GEN3X2
BLACK INSULATOR, TRANSMISSION EFFICIENCY: 40G



SIZE X	PART NO. USB-C40-S-RA-CS1-BK-T/R	REV. B
-----------	-------------------------------------	-----------

REF: S00197C	SCALE: NTS	SHEET 1 OF 2
--------------	------------	--------------


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

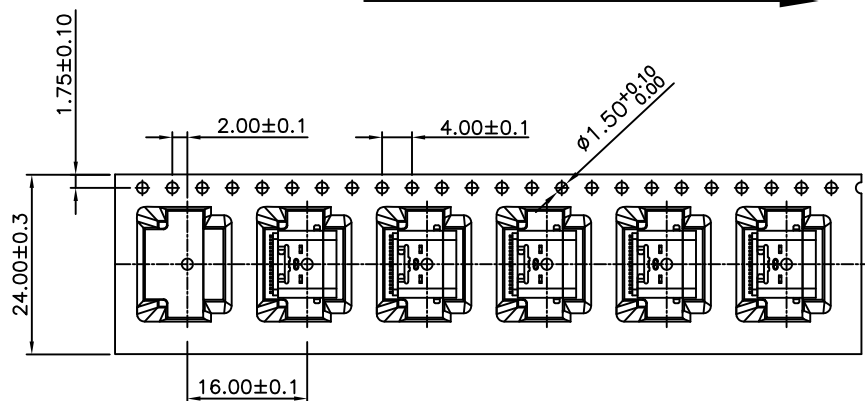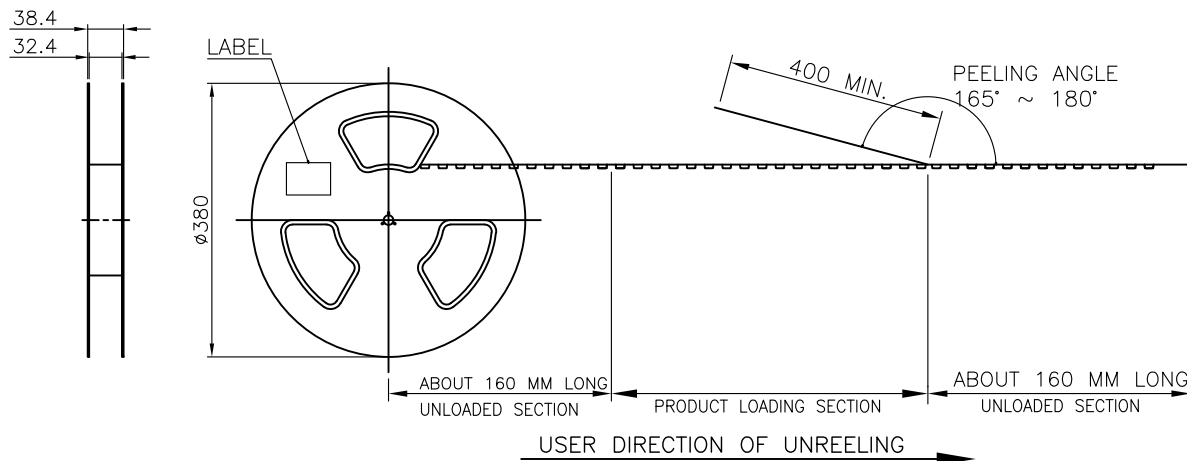

1000	10	10000 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

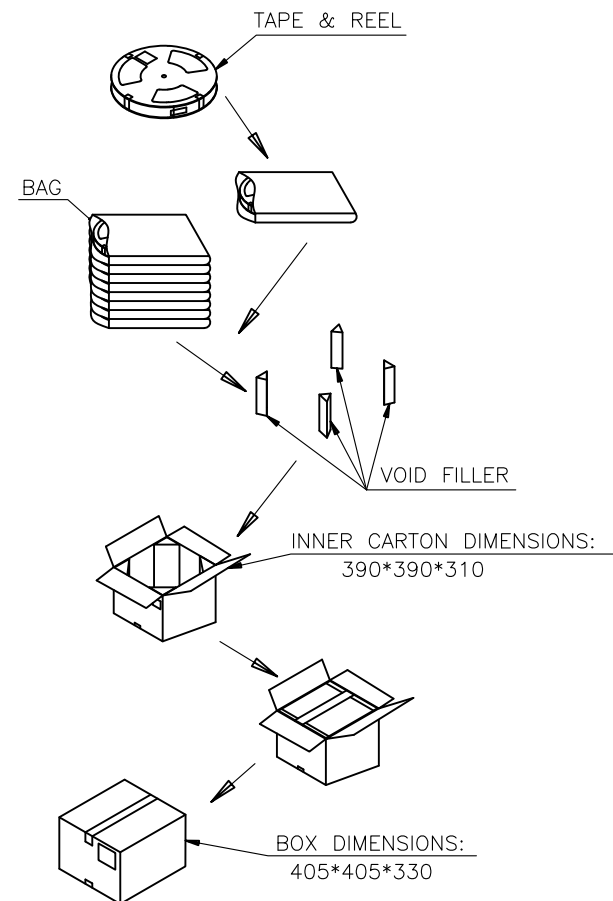

NOTE:

1.MATERIAL:

BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C , BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C , BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C .

2.PEELING STRENGTH: $0.1 \sim 1.3 \text{ N}$ ($10 \sim 130 \text{ GRAMS}$)

3.PEELING SPEED: 300 mm/min .

4.EACH BAG SHALL BE INCLUDED DESICCANT.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
X ± 0.50	$\pm 2^{\circ}$
.X ± 0.30	
.XX ± 0.20	
.XXX ± 0.10	

DRAWN	WX	11/24/22
CHECKED	AC1	11/24/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH



TITLE
UNIVERSAL SERIAL BUS TYPE C 4.0, GEN3X2
BLACK INSULATOR, TRANSMISSION EFFICIENCY: 40G

SIZE X	PART NO. USB-C40-S-RA-CS1-BK-T/R	REV. B
REF: S00197C	SCALE: NTS	SHEET 2 OF 2