

6

5

4







3

2

1

APPROVED: _____
DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|-----|-------|---------------|---------|------|
| - | | RELEASED | 1/22/08 | |
| A | | REDRAWN | 7/5/11 | |
| B | | REVISED SHAPE | 8/31/11 | |

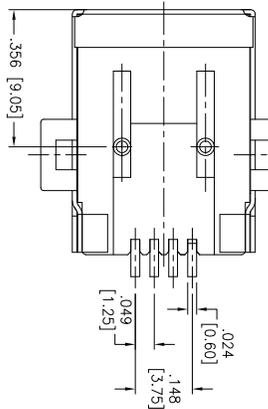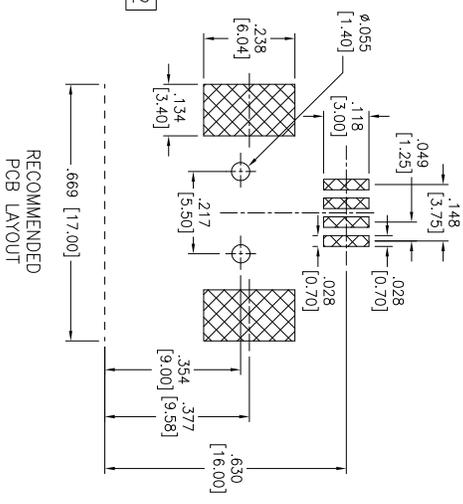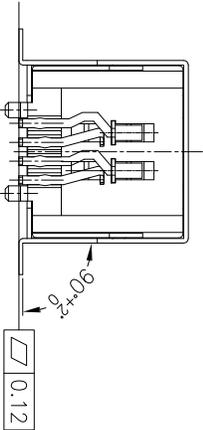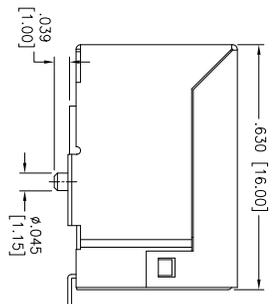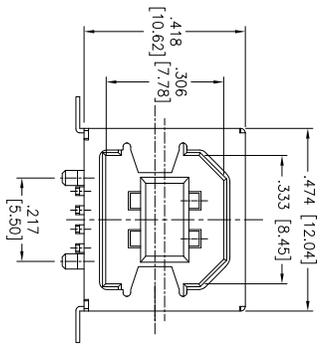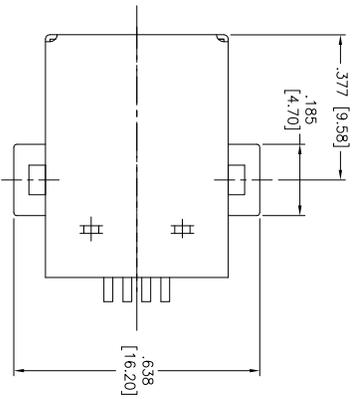

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Shield: Copper Alloy, Nickel plated

Contact Plating:

Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tails

Electrical:

Operating voltage: 30 VAC max

Current rating: 1.5 Amps max @250V AC

Contact Resistance: 30 mohms max. initial

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minut

Temperature Rating:

Operating temperature: -20°C to +60°C

Environmental:

Lead free, RoHS compliant.



| | |
|---|-------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED | |
| INCHES | |
| .X ± .10 | ØX ± .10 |
| .XX ± .020 | ØXX ± .015 |
| .XXX ± .015 | ØXXX ± .010 |
| APPROVALS | DATE |
| SS | 1/22/08 |

UNIVERSAL SERIAL BUS
SINGLE PORT, RIGHT ANGLE, SMT

| | | | | | |
|---|---------|---------------------|--------|--------|------|
| TITLE | SIZE | PART NO. | SCALE: | SHEET | REV. |
| UNIVERSAL SERIAL BUS SINGLE PORT, RIGHT ANGLE, SMT | X | USB-B-S-RA-TSMT-T1R | NTS | 1 OF 1 | B |
| APPROVED | CHECKED | REF: | SCALE: | SHEET | REV. |
| | | S00005C | NTS | 1 OF 1 | B |

6

5

4

3

2

1