

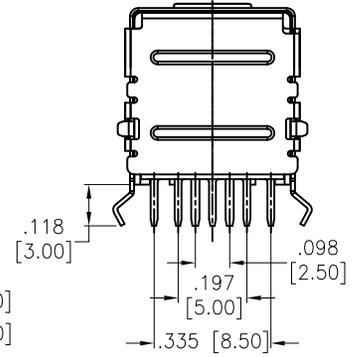
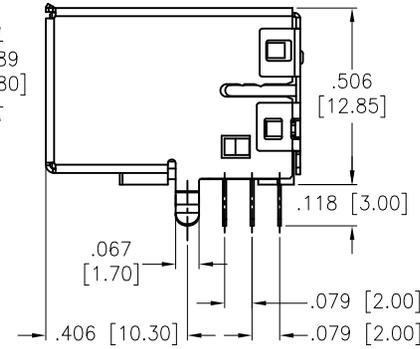

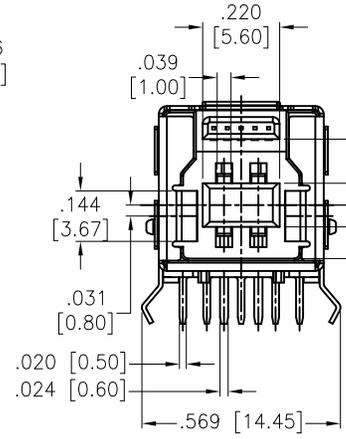


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/18/22	

APPROVED: _____
DATE: _____ TITLE: _____

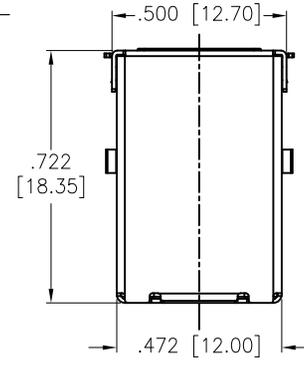

SPECIFICATIONS:
Material:
Insulator: (LCP) Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Blue
Contacts: Copper alloy
Shell: Brass, nickel plated
Back Shell: SUS304
Plating:
30u" Gold over Nickel underplate on contact area,
Tin over Nickel underplate on solder tails.
Electrical:
Current rating: 1.8 Amp for Pin1 & Pin4
0.25 Amp for other Pin
Voltage rating: 30 V
Contact resistance: 30mΩ max for Pin1 & Pin4
50mΩ for other Contacts.
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 100 VAC (RMS)
Temperature Rating:
Operating temperature: -20°C to +85°C
Environmental:
Lead free, RoHS compliant.

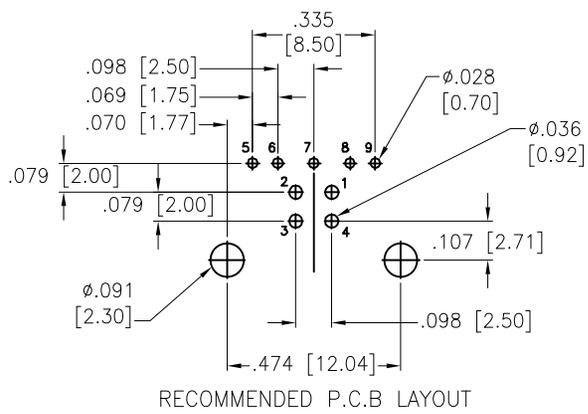

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM], TOLERANCES: EXCEPT AS NOTED		
INCHES	HOLES	
.x ± .10	∅x	±.10
.xx ± .020	∅xx	±.015
.xxx ± .015	∅xxx	±.010
DRAWN	JJ	2/18/22
CHECKED	NP	2/18/22
APPROVED		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH		

TITLE		UNIVERSAL SERIAL BUS, TYPE B
FEMALE, RIGHT ANGLE, DIP TYPE		
SIZE	PART NO.	REV.
X	USB-B3-S-RA-CS5A-30-HT	-
REF:	S00005C	SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1

D

D

C

C

B

B

A

A

6 5 4 3 2 1