

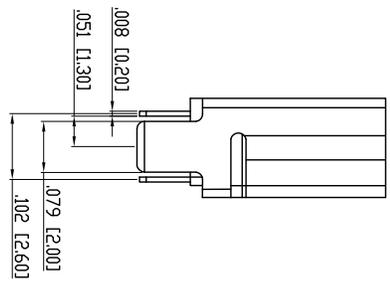
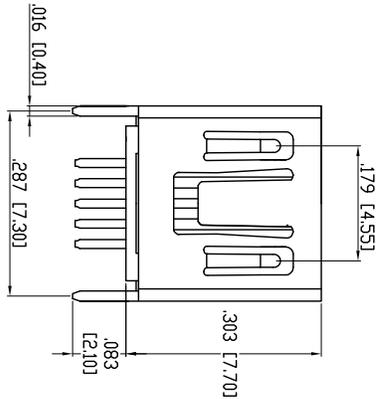
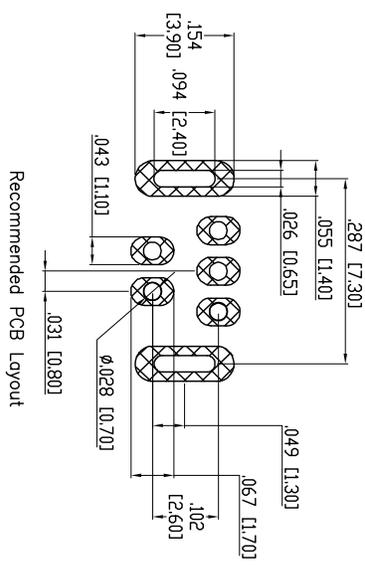


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/25/07	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

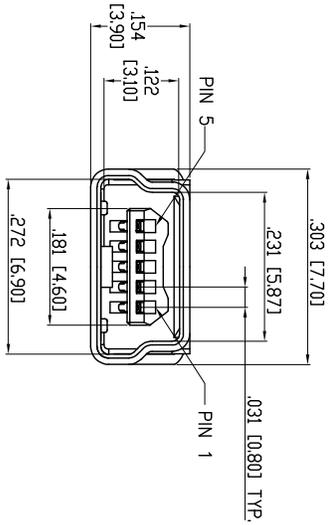

**SPECIFICATIONS:**

**Material:**  
 Insulator: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
**Plating:**  
 Gold Flash over Nickel underplate on contact area  
 Tin over Copper underplate on PCB tails  
**Electrical:**  
 Operating voltage: 30 VAC max  
 Current rating: 1 Amps max  
 Contact resistance: 50 Mohms max  
 Insulation resistance: 100 Mohms min  
 Dielectric withstanding voltage: 100 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -20°C to +60°C  
 Environmental:  
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM  
 TOLERANCES: EXCEPT AS NOTED  
 .XX ± 0.25  
 .XXX ± 0.20



TITLE: MINI USB, TYPE B, 5PIN, VERTICAL  
 PCB MOUNT

APPROVALS		DATE
DRAWN	SS	9/25/07
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	MUSB-B5-S-VT	
REF:	SCALE: NTS	SHEET 1 OF 1