
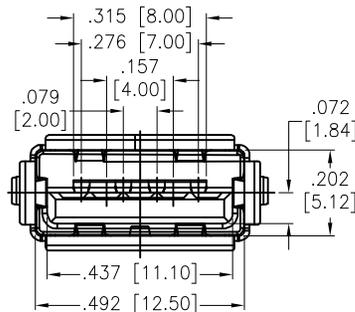
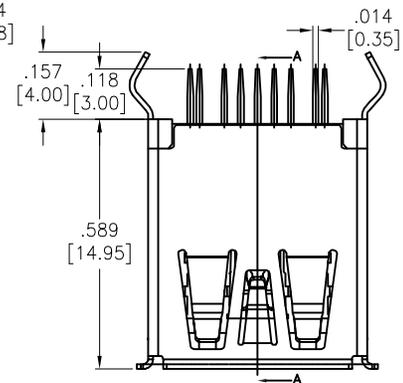
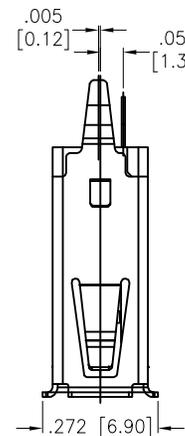
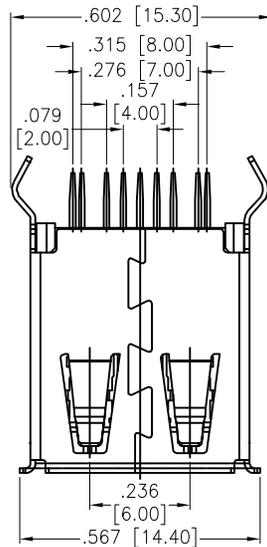
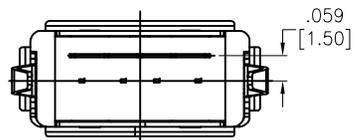


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/21	

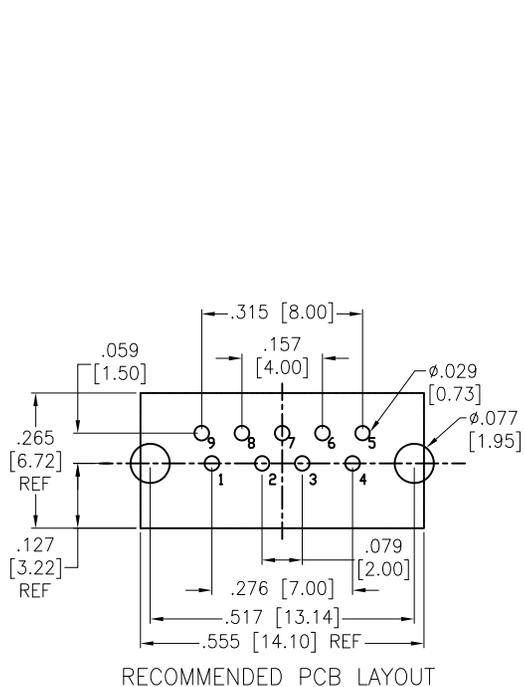

**SPECIFICATIONS:**

Material:  
 Insulator: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: Blue  
 Contacts: Copper Alloy  
 Shell: SUS201, Nickel plated  
 Plating:  
 Gold flash over Nickel underplate on contact area,  
 Tin over Nickel underplate on solder tails.

Electrical:  
 Current Rating: 1.5 Amp  
 Contact resistance: 30 mohms max.  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 100 VRMS  
 Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	±.10	ØX	±.10
.XX	±.020	ØXX	±.015
.XXX	±.015	ØXXX	±.010

DRAWN	LH	11/16/21
CHECKED	TL	11/16/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH



TITLE		
UNIVERSAL SERIAL BUS 3.0, TYPE A SINGLE PORT, VERTICAL MOUNT		
SIZE	PART NO.	REV.
X	USB-A3-S-VT-CS1F-HT	-

REF:	S00087T	SCALE:	NTS	SHEET	1 OF 1
------	---------	--------	-----	-------	--------