
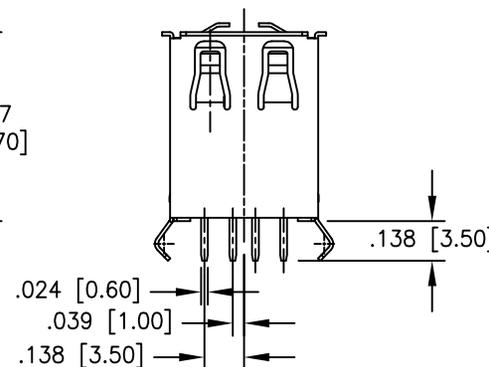
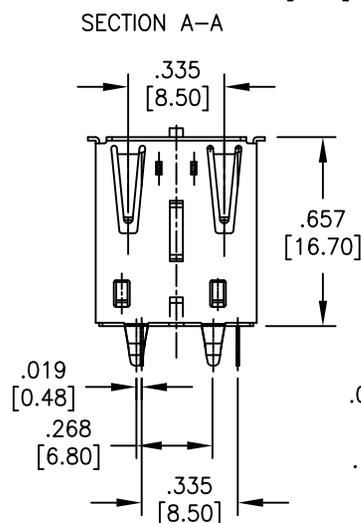
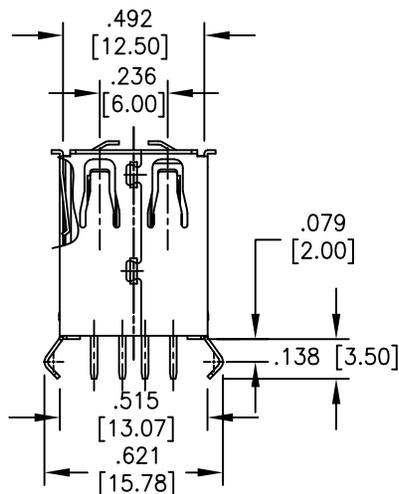
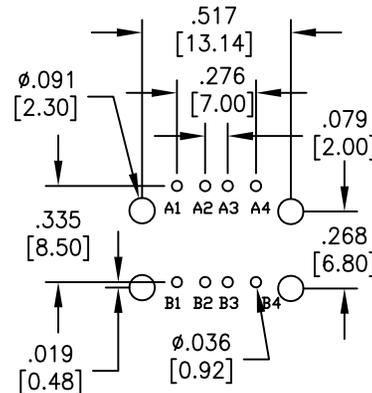
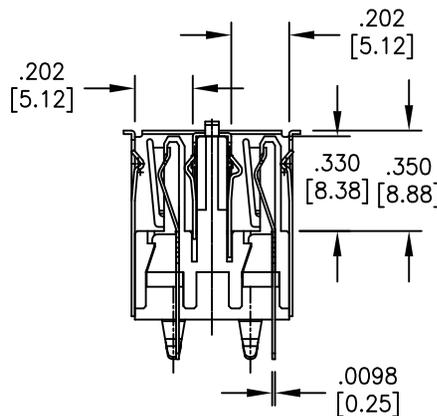


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/22/05	
A		REDRAWN	9/29/09	
B		UPDATED TEMPERATURE RATING	7/18/13	SS
C		UPDATED SPEC.	9/30/16	HR/YC
D		UPDATED SPEC.	2/12/18	SS

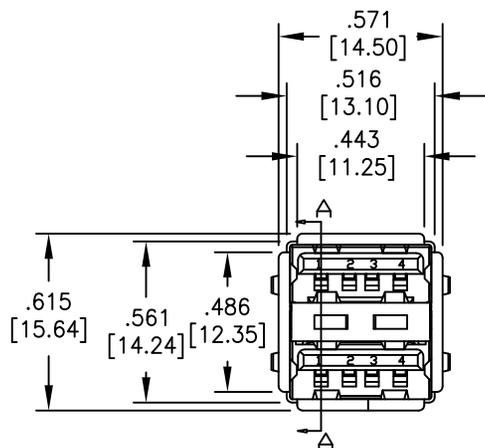

**SPECIFICATIONS:**

Material:  
 Insulator: PBT, Glass filled, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Shell: Steel, nickel plated  
 Plating:

Gold flash over Nickel underplate on contact area,  
 Tin over Nickel underplate on PCB tails

Electrical:  
 Voltage rating: 30 V  
 Current rating: 1.5 Amp @ 250 VAC  
 Contact resistance: 30 mohms max.  
 Insulation resistance: 1000 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:  
 Operating temperature: -55°C to +85°C

Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
.X ± .10	∅X ± .10
.XX ± .020	∅XX ± .015
.XXX ± .015	∅XXX ± .010
APPROVALS	
DRAWN	DATE
CHECKED	
APPROVED	

		TITLE	
		UNIVERSAL SERIAL BUS DUAL PORT, VERTICAL, PCB	
SIZE	PART NO.	REV.	
X	USB-A-D-VT	D	
REF: S00005C	SCALE: NTS	SHEET 1 OF 1	