


APPROVED: _____

DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|-----|-------|-----------------|---------|-------|
| - | | RELEASED | 12/3/04 | |
| A | | REDRAWN | 6/8/11 | |
| B | | UPDATED DRAWING | 9/14/17 | HR/TY |

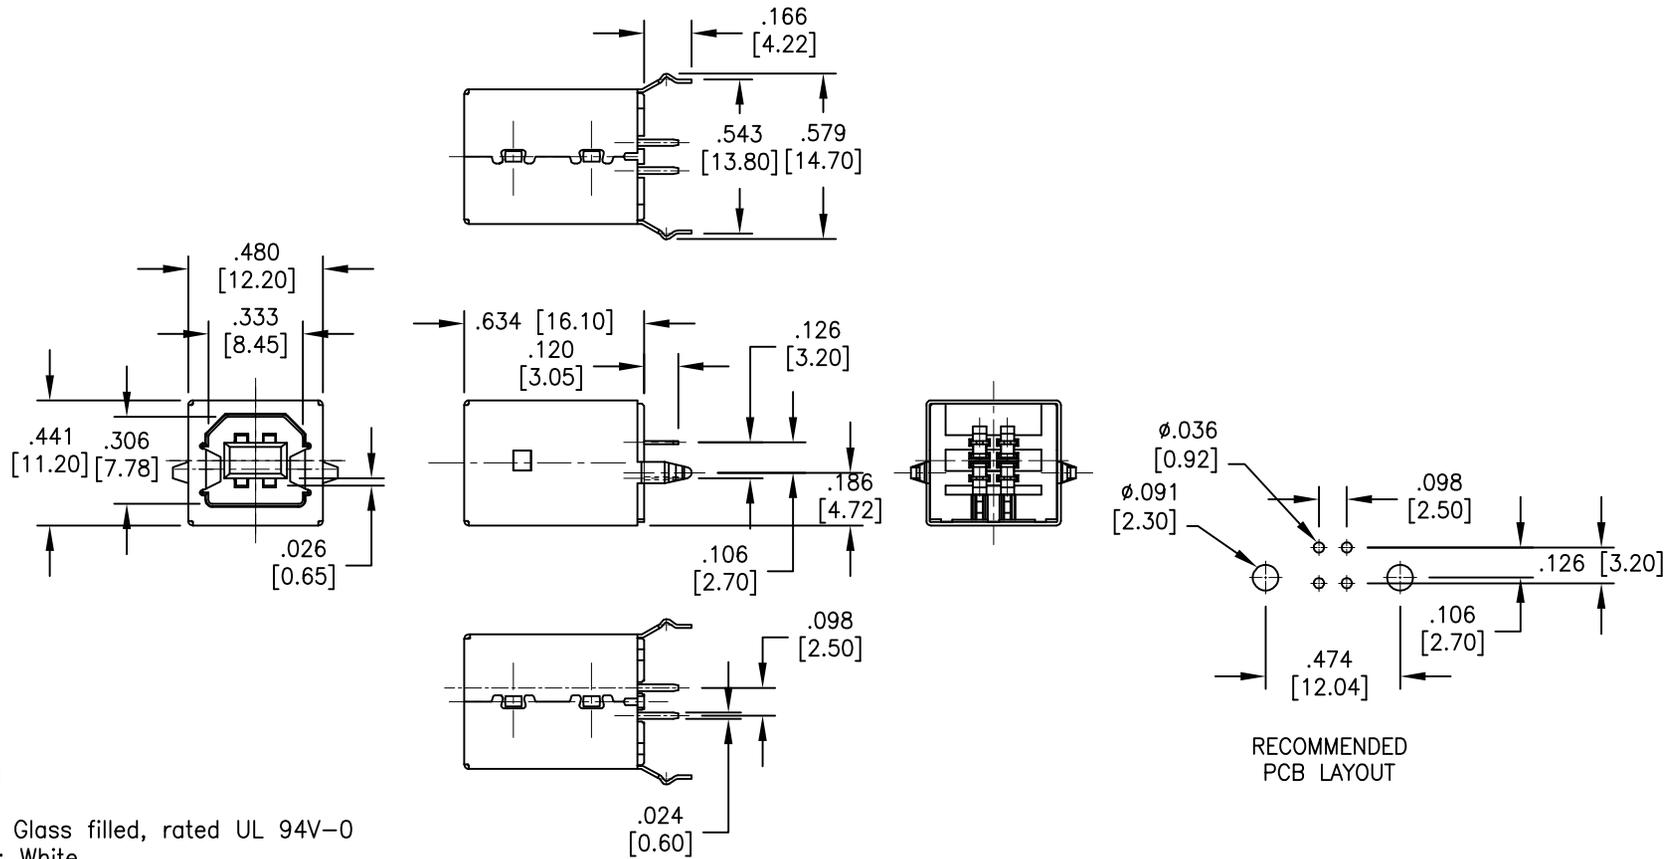

SPECIFICATIONS:

Material:

Insulator: PBT, Glass filled, rated UL 94V-0

Insulator color: White

Contacts: Phosphor Bronze

Shell: Copper Alloy, nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on PCB tails

Electrical:

Voltage rating: 30 VAC

Current rating: 1.5 Amp

Contact resistance: 30 mohms max.

Insulation resistance: 1000 Mohms min.

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

Operating temperature: -20°C to +60°C

Environmental:

Lead free, RoHS compliant.



| | | | |
|---|--------|-------|--------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED | | | |
| INCHES | | HOLES | |
| .X | ± .10 | Ø.X | ± .10 |
| .XX | ± .020 | Ø.XX | ± .015 |
| .XXX | ± .015 | Ø.XXX | ± .010 |



| | | | |
|---|---------|---------|---------------|
| TITLE UNIVERSAL SERIAL BUS SINGLE PORT, VERTICAL, PCB | | | |
| APPROVALS | DATE | SIZE | PART NO. |
| DRAWN | SS | 10/4/04 | USB-B-S-VT-WT |
| CHECKED | | | |
| APPROVED | | | |
| REF: | S00005C | SCALE: | NTS |
| SHEET 1 OF 1 | | REV. | B |