
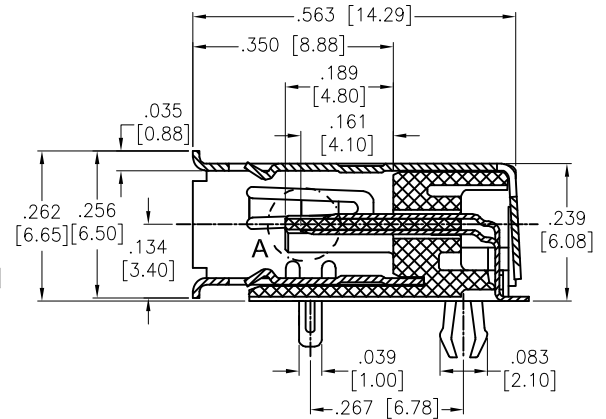
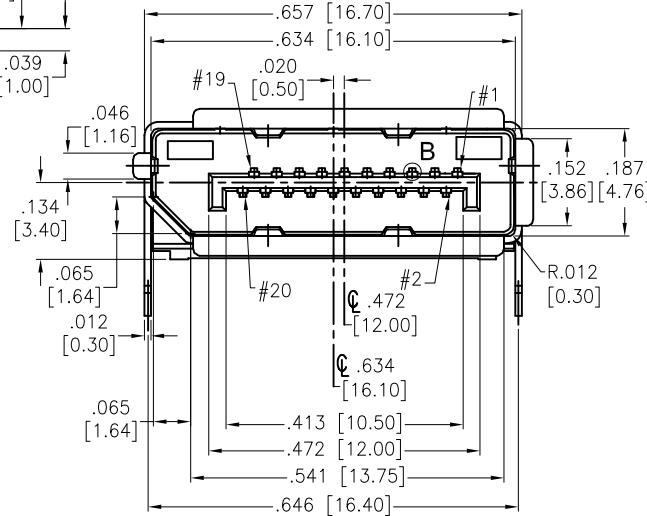


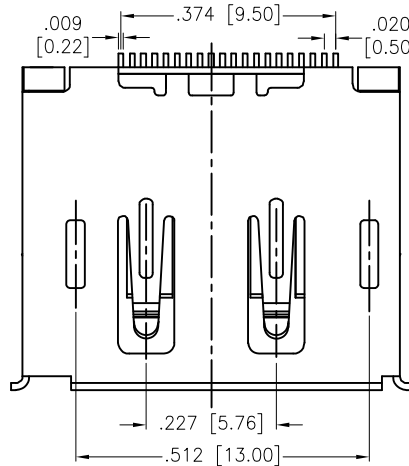


APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description | Date    | Appr   |
|-----|-------|-------------|---------|--------|
| -   |       | RELEASED    | 8/5/14  |        |
| A   |       | UPDATE SPEC | 7/16/18 | AY/RC1 |

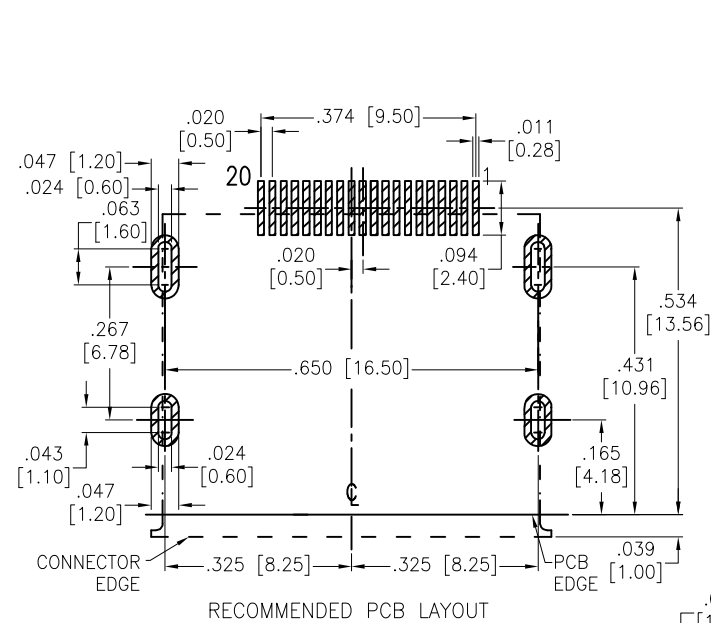

#### SPECIFICATIONS:

Material:  
Insulator: Hi-temp thermoplastic, rated UL 94V-0  
Insulator color: Black  
Contact: Brass  
Shell: Brass, Nickel plated  
Plating:  
Gold flash over Nickel underplate on contact area,  
Tin over Nickel underplate on solder tails  
Electrical:  
Operating voltage: 40 VAC max  
Current rating: 0.5 Ampere per contact  
Contact Resistance: 30 mohms max.  
Insulation Resistance: 100 Mohms min.  
Withstanding Voltage: 500 VDC  
Temperature Rating:  
Operating temperature: -40°C to +85°C  
Environment:  
Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

|                                                                                                                                  |        |        |        |                                                                                                                                                                                    |                       |
|----------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| UNLESS OTHERWISE SPECIFIED<br>ALL DIMENSIONS ARE INCHES [MM]<br>TOLERANCES: EXCEPT AS NOTED<br>INCHES                      HOLES |        |        |        | <br>Metabee (Chengdu) Technology Co., Ltd.<br>Tel: +8615926241606 E-mail: Sales@metabeeai.com |                       |
| .X                                                                                                                               | ± .10  | Ø.X    | ± .10  |                                                                                                                                                                                    |                       |
| .XX                                                                                                                              | ± .020 | Ø.XX   | ± .015 | TITLE<br>DISPLAYPORT RECEPTACLE, R/A, SMT TYPE<br>20 PINS, W/ BOARDLOCK                                                                                                            |                       |
| .XXX                                                                                                                             | ± .015 | Ø.XXX  | ± .010 |                                                                                                                                                                                    |                       |
| APPROVALS                                                                                                                        |        | DATE   |        | SIZE                                                                                                                                                                               | PART NO.              |
| DRAWN                                                                                                                            | AY     | 8/5/14 |        | X                                                                                                                                                                                  | DPC-F-S-RA-SMT-BL-T/R |
| CHECKED                                                                                                                          | NP     | 8/5/14 |        | REV.                                                                                                                                                                               | A                     |
| APPROVED                                                                                                                         |        |        |        | REF:                                                                                                                                                                               | S00078T               |
|                                                                                                                                  |        |        |        | SCALE:                                                                                                                                                                             | NTS                   |
|                                                                                                                                  |        |        |        | SHEET 1 OF 1                                                                                                                                                                       |                       |