

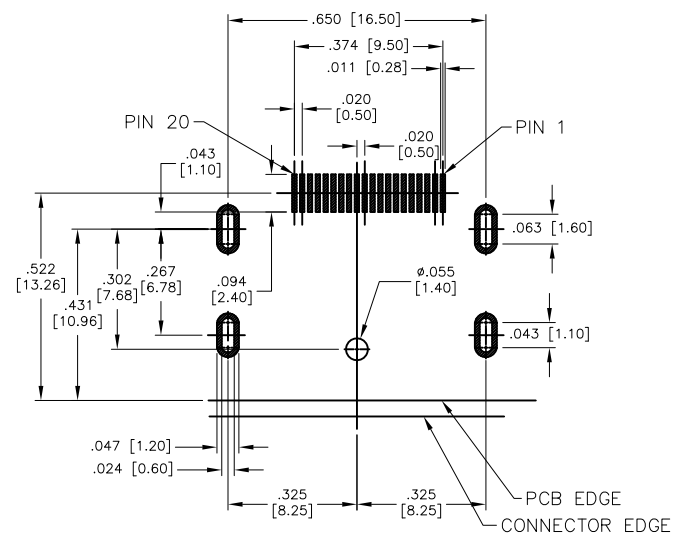
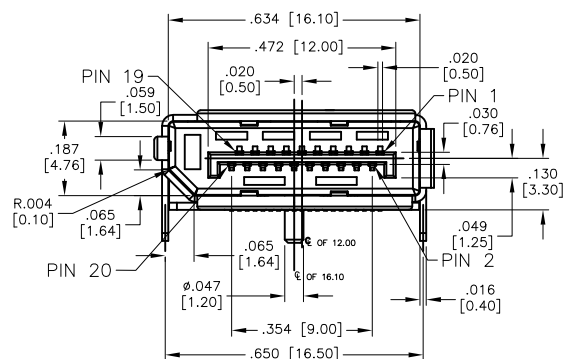


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/24/14	
A		UPDATE DRAWING	10/27/17	AY/RC1
B		ADDED DIM.	8/28/20	AY/TY

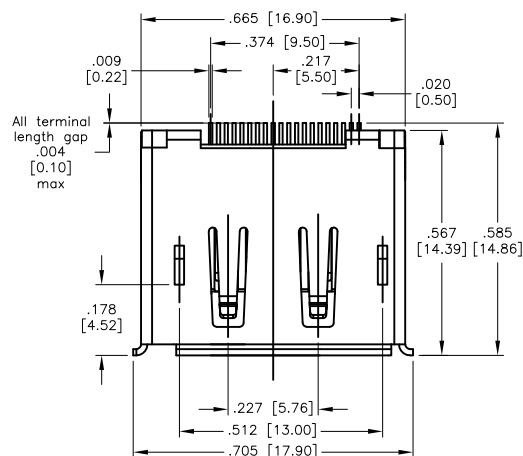

RECOMMENDER PCB LAYOUT(THICKNESS=1.6±0.15)

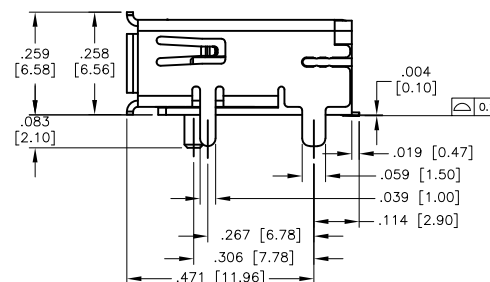

SPECIFICATIONS:

Material:

Insulator: Thermal Plastic, rated UL 94V-0

Insulator color: Black

Contact: Copper Alloy

Shell: Copper Alloy, Nickel plated

Plating:

15u" Gold over Nickel underplate on contact area.

Tin over Nickel underplate on solder tails

Electrical:

Operating voltage: 40 VAC

Current rating: 0.5 Amps min

Contact Resistance: 30 mohms max.

Insulation Resistance: 100 Mohms min.

Withstanding Voltage: 500V AC for 1 minute

Temperature Rating:

Operating temperature: -20°C to $+85^{\circ}\text{C}$

Environmetal:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE	DISPLAYPORT RECEPTACLE, R/A, SMT TYPE 20 PIN, 15 u" GOLD PLATED, TAPE & REEL
-------	---

SIZE X	PART NO. DPC-F-S-RA-SMT-P-CS2-15-T/R	REV B
-----------	---	----------

REF: S00013T	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------