





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/21/19	

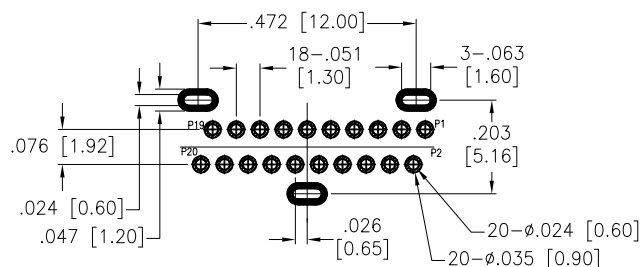

RECOMMENDED PCB LAYOUT

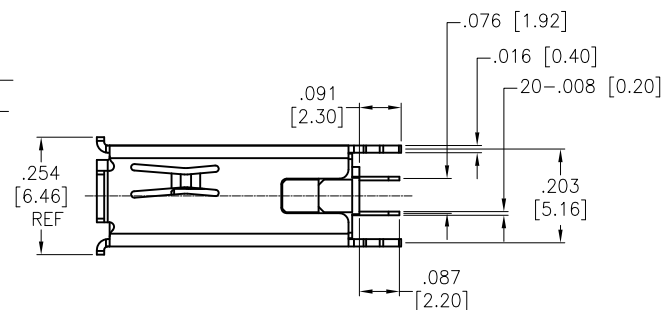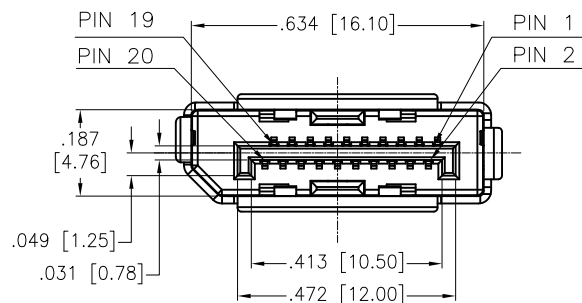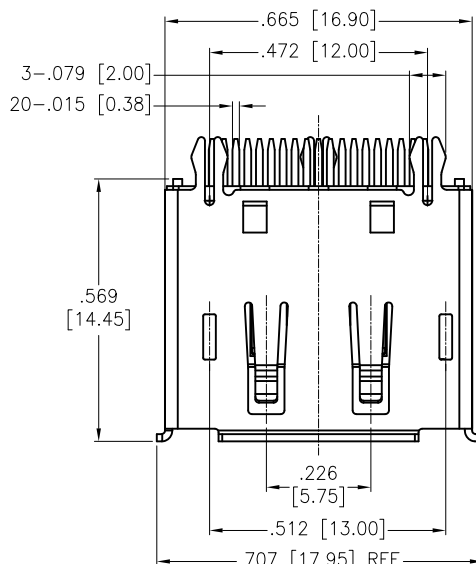

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator Color: Black

Contact: Copper Alloy

Shell: Brass, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Nickel underplate on solder area

Electrical:

Voltage: 40 VAC(RMS) max

Current rating: 0.5 Amps per Contact

Contact resistance: 30 mohms max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 500 VAC(RMS)

Temperature Rating:

Operating temperature: -55°C to +85°C

Environment:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS	DATE
-----------	------

DRAWN	AY	2/21/19
-------	----	---------

CHECKED	LW	2/21/19
---------	----	---------

APPROVED		
----------	--	--



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE
DISPLAYPORT RECEPTACLE, VERTICAL,
SINGLE PORT, 20 PIN, SEL GOLD PLATED

SIZE X	PART NO. DPC-F-S-VT-CS1	REV. -
-----------	----------------------------	-----------

REF: S00027T	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------