
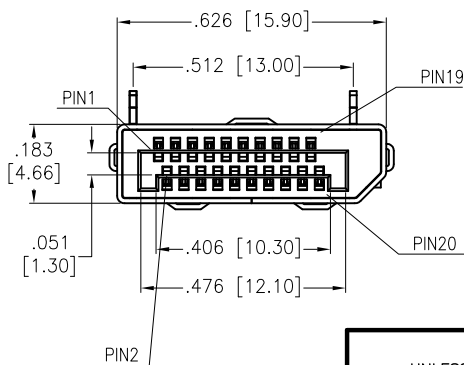
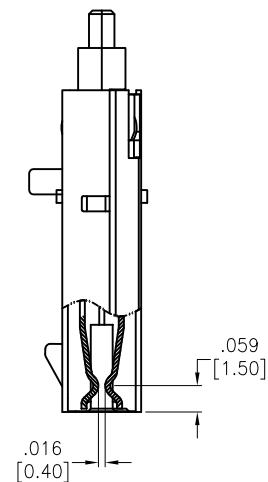
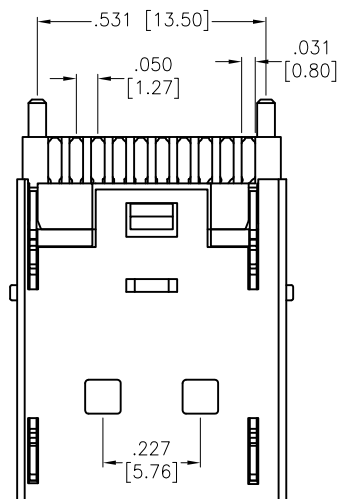
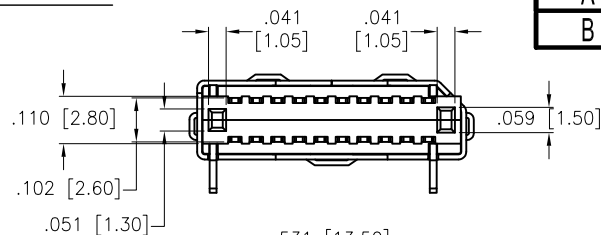


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/26/15	
A		UPDATED DRAWING	3/11/15	HR/NP
B		UPDATED DRAWING	10/11/18	HR/RC1

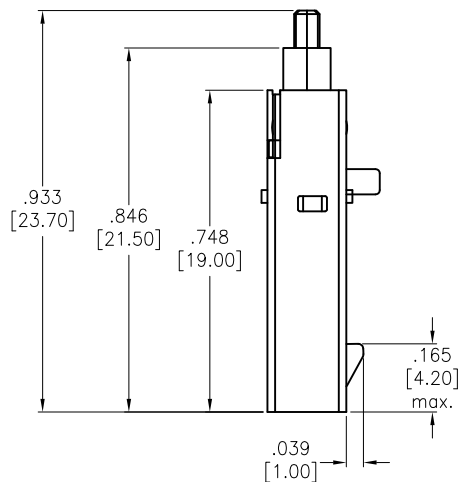

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Shield: SPCC, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area

Electrical:

Voltage rating: 40 VAC RMS

Current rating: 0.5 A min

Contact resistance: 60 mohms max

Insulation resistance: 100 Mohms max

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	HR	1/26/15
CHECKED	NP	1/26/15
APPROVED		

Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.comTITLE
DISPLAYPORT 20 PIN PLUG, ASSEMBLY TYPE
GOLD PLATED, SOLDER TYPE, W/ LATCH

SIZE X	PART NO. DPC-M-SD-CS1	REV. B
REF: S00161C	SCALE: NTS	SHEET 1 OF 1