


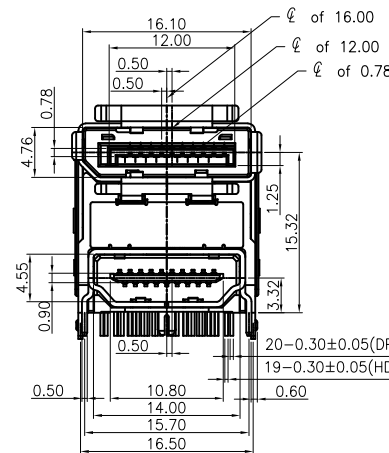



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/25/21	
A		UPDATE SPEC.	4/8/21	LH/KC

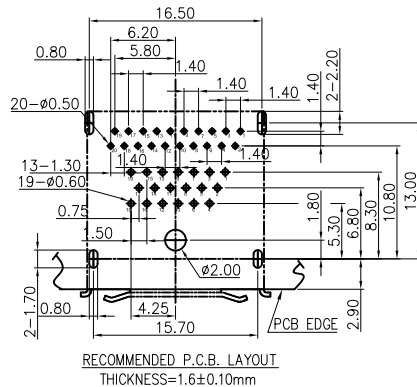

SPECIFICATIONS:

Material:

Housing(DP): PBT, rated UL 94V-0, Color: Blue

Housing(HDMI): Hi-Temp Thermoplastic, rated UL 94V-0, Color: Black

Terminal: Copper Alloy

Shell: (DP) SUS304, Nickel plated

(HDMI) SUS304, Nickel plated

Shield: Stainless Steel

Grounding: Stainless Steel

Plating:

Gold Flash over Nickel underplate on contact area

Matte Tin over Nickel underplate on solder tails

Electrical:

Voltage: 40 VAC(RMS) max.

Current rating: 0.5 Ampere per Contact

Contact resistance: 30 mohms max

Insulation resistance: 100 Mohms min

A Dielectric withstanding voltage: 500V DC(RMS)

Mechanical:

Total mating force: 4.5 Kgf Max.

Total unmating force: 1.0 Kgf Min.

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

DRAWN	WX	3/25/21
CHECKED	AC	3/25/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE DUAL PORT, DISPLAYPORT FEMALE 20 P TOP
/ HDMI FEMALE 19 P BOTTOM

SIZE X	PART NO. DPD-DP20S/HDMI19S-H	REV. A
-----------	---------------------------------	-----------

REF: S00027T	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------