
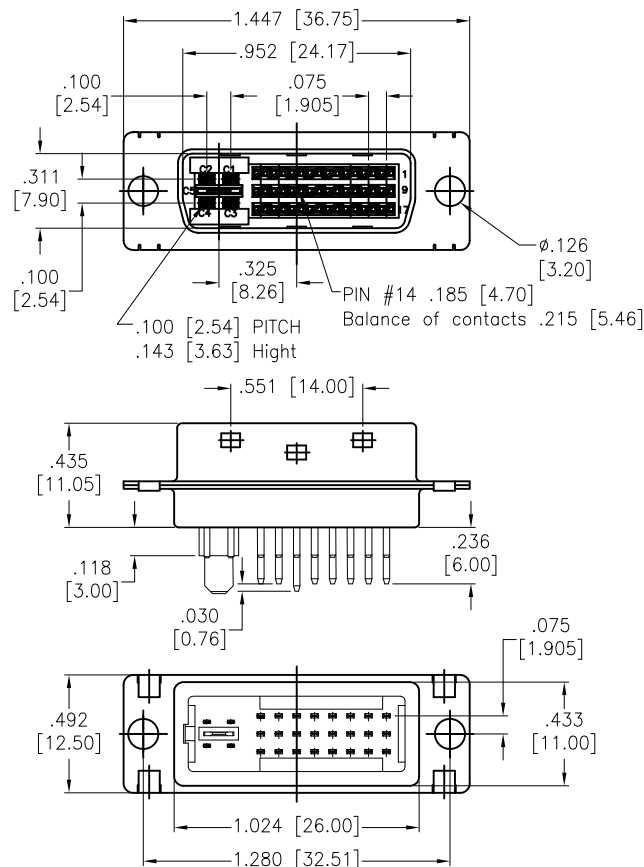


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/9/19	



SPECIFICATIONS:

Material:
 Insulator: Glass filled thermoplastic, rated UL 94V-0
 Insulator Color: Black
 Contacts: Brass
 Shell: Steel, Nickel plated
 Plating:
 Gold flash over Nickel underplate on mating area,
 Tin over Copper underplate on tailss
 Electrical:
 Rating: 1.5 Amp @ 40 VAC (rms)
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC (rms)
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 ØX ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com		
APPROVALS		DATE	TITLE DVI CONNECTOR, 24+5PINS, MALE STRAIGHT, ANALOG		
DRAWN	AY	4/9/19			
CHECKED	LW	4/9/19			
APPROVED					
			SIZE X	PART NO. DVI-PT-24-2-01	REV .
			REF: S00223T	SCALE: NTS	SHEET 1 OF 1

D

C

B

A