
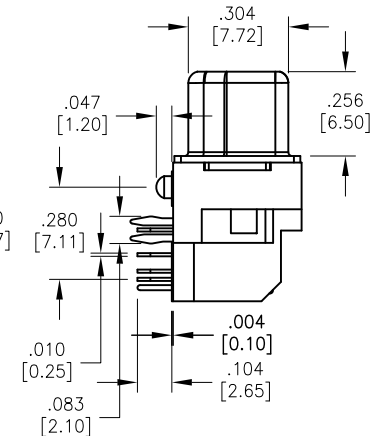
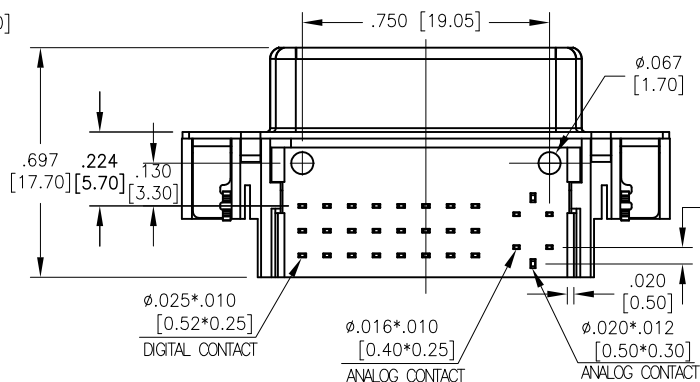
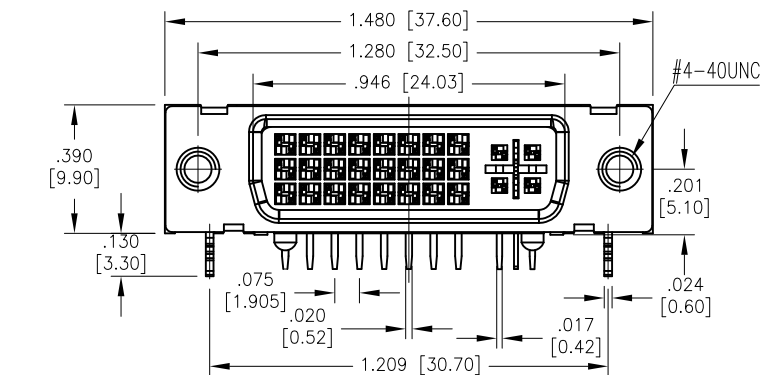


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/11/05	
A		REDRAWN	9/26/11	
B		REDRAWN	6/3/14	AY/YC
C		UPDATE DIM.	10/19/15	AY/YC

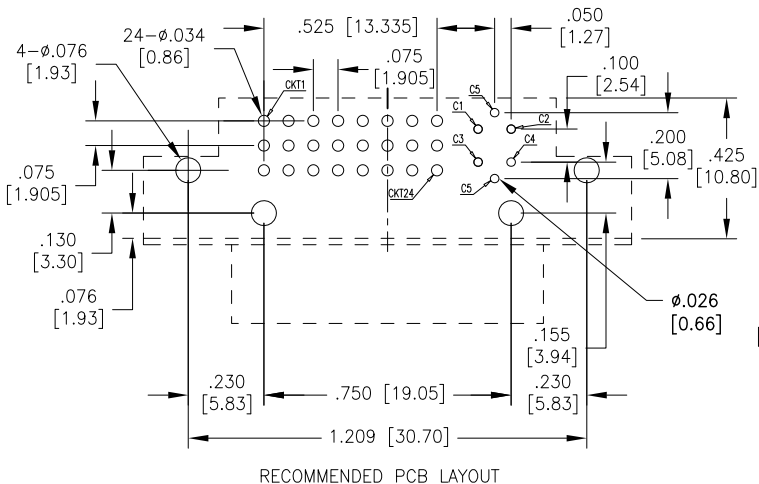

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Ivory

Latch: PA66, rated UL 94V-0, color: Ivory

Contacts: Copper Alloy

Shell: SPCC, Nickel plated

Boardlock: SPCC, Tin plated

Plating:

Gold flash over Nickel underplate on mating area,

Tin over Copper underplate on tails

Electrical:

Operating voltage: 40 VAC max

Current rating: 1.5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VDC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DRAWN	SS	DATE
CHECKED		
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE
DIGITAL VIDEO INTERFACE SOCKET
RIGHT ANGLE, PCB TAILS, ANALOG

SIZE	PART NO.	REV.
X	DVI-SL-24-2	C
REF:	S00027T	SCALE: NTS
SHEET	1	OF 1