
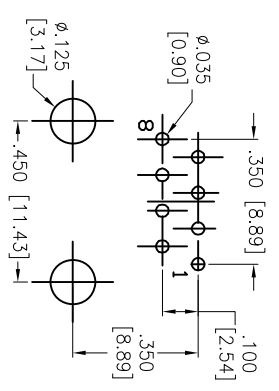


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/16/13	

APPROVED: _____
 DATE: _____ TITLE: _____

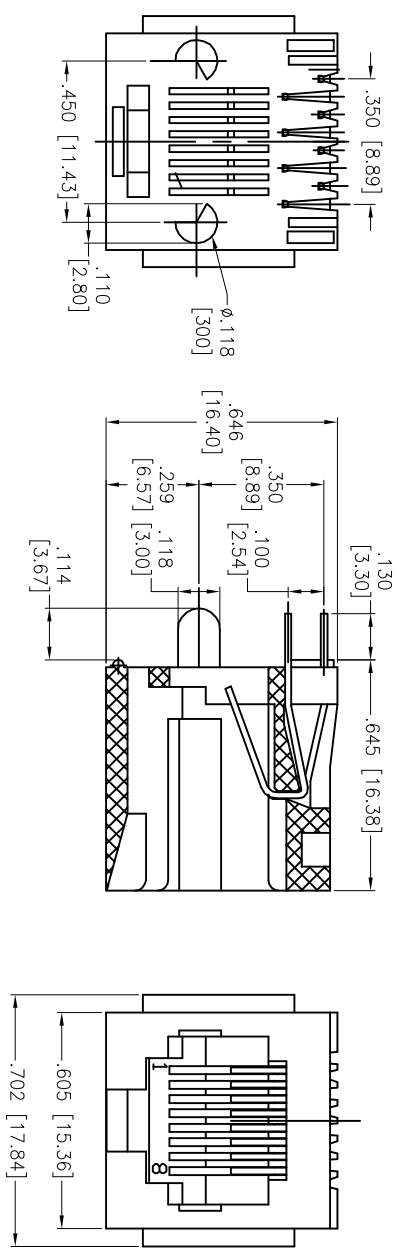

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Yellow, P114C follow Pantone color

Contacts: Phosphor Bronze

Plating:

Gold over Nickel underplate on contact area,
 Tin over Copper underplate on PCB tails

Electrical:

Operating voltage: 125 VAC max

Current rating: 1.5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes DATE

.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

ETA BEE

MODULAR TELEPHONE JACK, 8P8C
TOP ENTRY, MOON PEG, YELLOW P114C

APPROVALS	DATE
DRAWN	HR
CHECKED	GC
APPROVED	

REF: S00005C	SCALE: NTS	SHEET 1 OF 1
SIZE X	PART NO. MTJ-883X1-MP-P114C	REV. -