




APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/6/18	
A		UPDATED DRAWING	9/10/18	HR/SL
B		UPDATED DIM.	10/15/18	HR/AC1
C		UPDATED DRAWING	5/25/20	LH/AY1
D		UPDATED DRAWING	5/29/20	AY/AY1

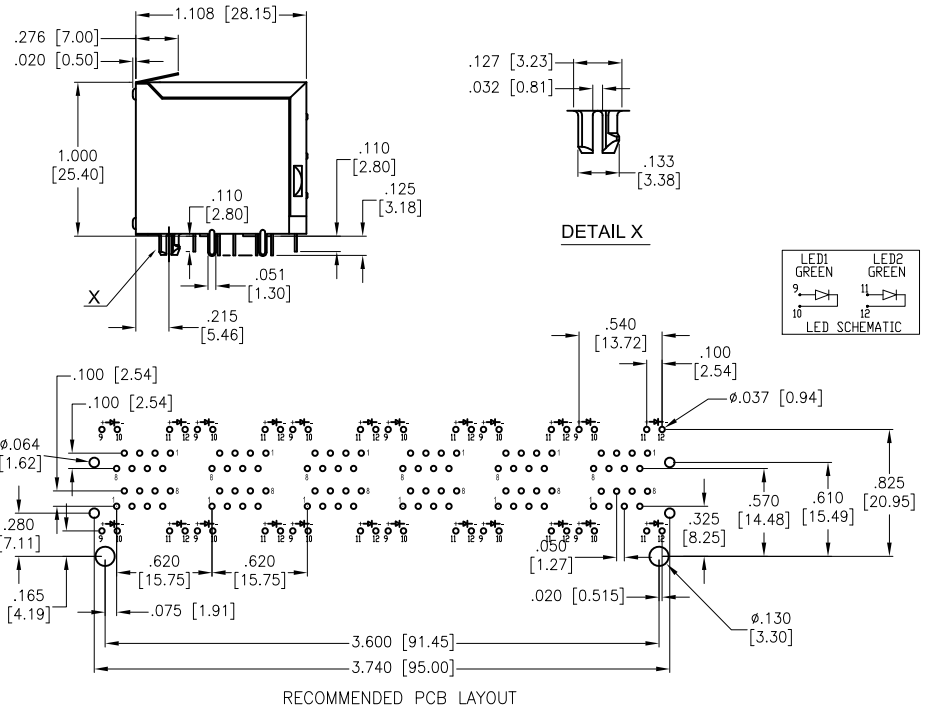

SPECIFICATIONS:
 Material:
 Insulator: Bottom Housing: Nylon46, rated UL 94V-0
 Top Housing: PBT, Glass reinforced, rated UL 94V-0
 Insulator Color: Black
 Contacts: Phosphor Bronze
 Shield: Copper Alloy, Nickel plated
 Plating:
 Gold over Nickel underplate on contact area
 Gold flash over Nickel underplate on solder tails
 Electrical:
 Voltage Rating: 150 VAC max
 Current rating: 1.5 Amps max
 Contact Resistance: 20 mohms max.
 Insulation resistance: 500 Mohms min @500 VDC
 Dielectric withstanding voltage: 1500 Vrms for 1 minut
 Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

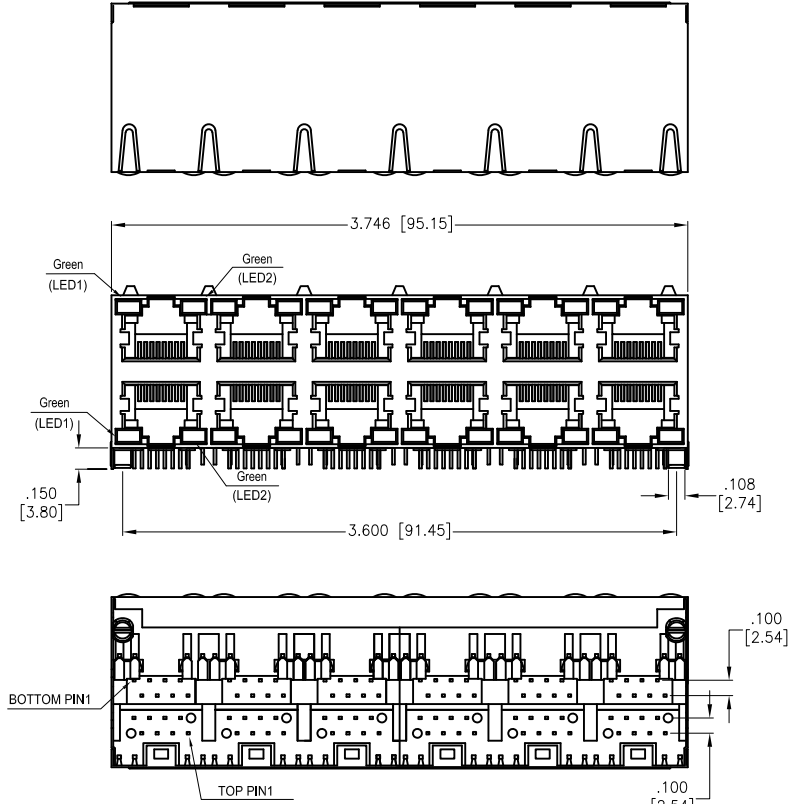

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	HR	8/6/18
CHECKED	SL	8/6/18
APPROVED		

TITLE: MODULAR JACK GANGED, 12 PORT, 8P8C
 W/LED1 GREEN, W/LED2 GREEN

SIZE	PART NO.	REV.
X	MTJG-12-88JX1-FSH-PG-LD-Y	D

REF: S00065T SCALE: NTS SHEET 1 OF 1