

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/24/07	

APPROVED: _____

DATE: _____ TITLE: _____

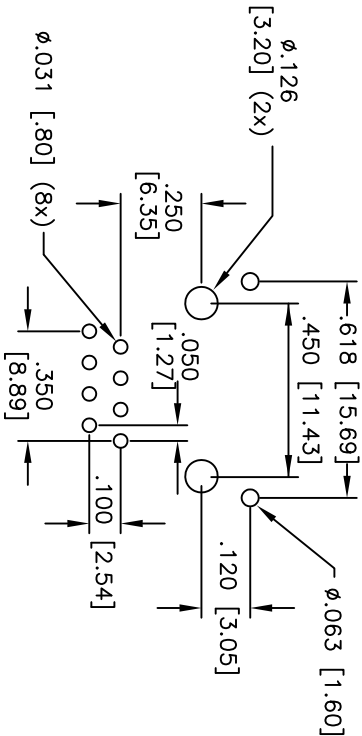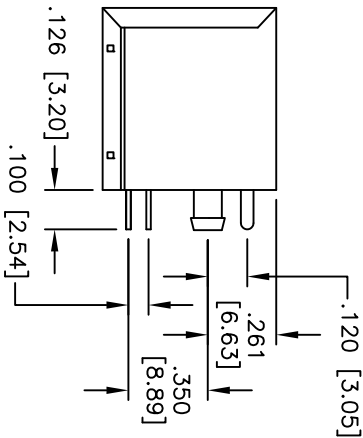

PLATING	
X	Gold Flash
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold over Nickel underplate on contact area, Tin over

Copper underplate on PCB tails

Electrical:

Operating voltage: 150 VAC max

Current rating: 1.5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +125°C

Environmental:

Lead free, RoHS compliant.



MODULAR TELEPHONE JACK, 8P8C
VERTICAL, PCB, FULL SHIELD

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				TITLE			
.X	± .10	Ø.X	± .10	MODULAR TELEPHONE JACK, 8P8C VERTICAL, PCB, FULL SHIELD			
.XX	± .020	Ø.XX	± .015				
.XXX	± .015	Ø.XXX	± .010				
APPROVALS			DATE				
DRAWN	SS	9/24/07		SIZE	PART NO.	REV.	
CHECKED				X	MTJ-88FX1-FS	-	
APPROVED				REF:	SCALE: NTS	SHEET 1	OF 1