


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		TEMPORARILY FYI ONLY	3/6/13	

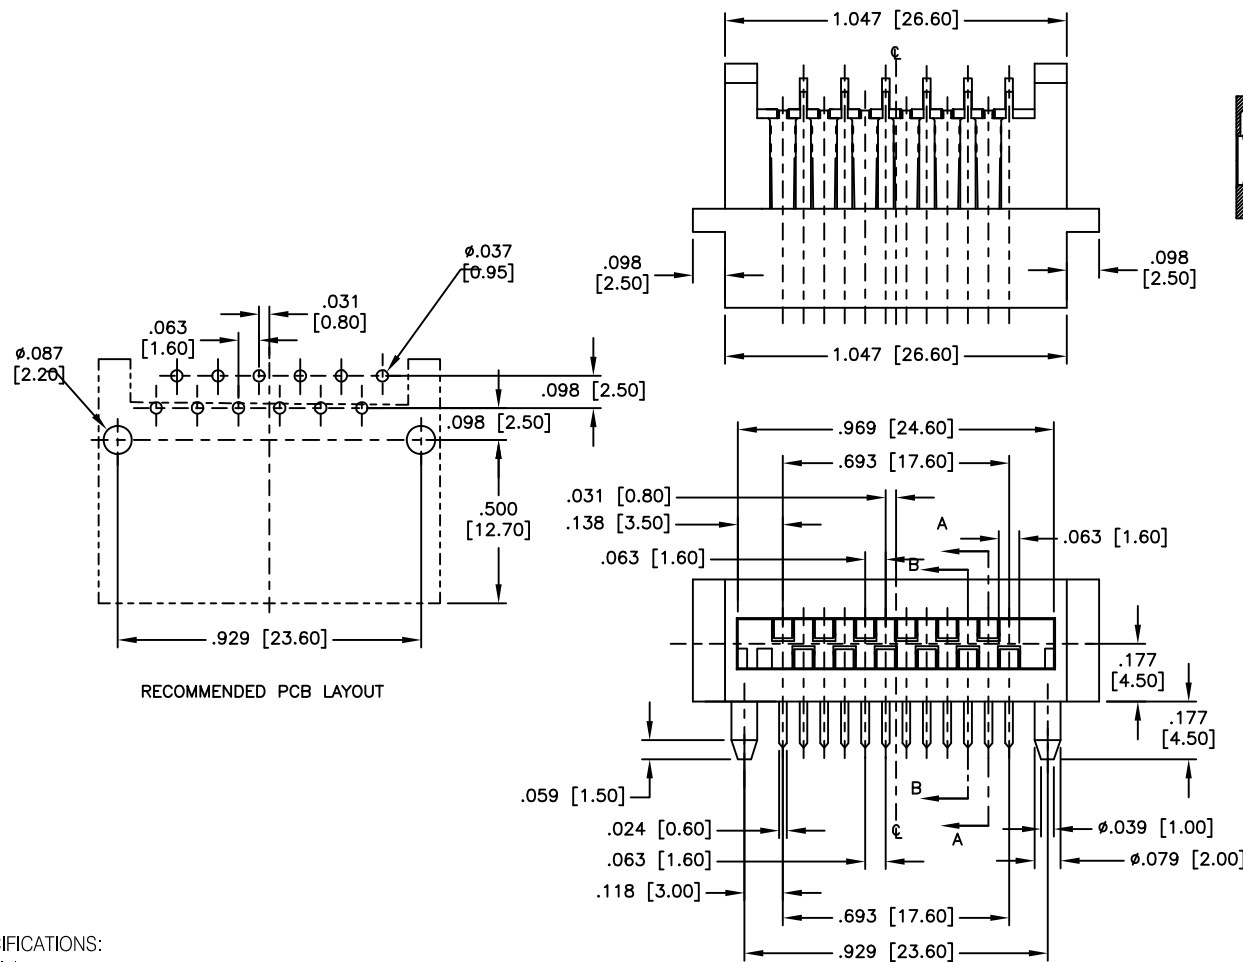

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold over Nickel underplate on contact area,
 Tin over Copper underplate on PCB tails
 Electrical:
 Operating voltage: 125 VAC max.
 Current rating: 1 Amps max.
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES HOLES			
.X ± .10	Ø.X ± .10	TITLE .063 [1.60 PITCH BOARD TO BOARD, 12P SOCKET CONNECTOR, RIGHT ANGLE	
.XX ± .020	Ø.XX ± .015		
.XXX ± .015	Ø.XXX ± .010		
APPROVALS		DATE	
DRAWN	AY	3/6/13	
CHECKED	YC	3/6/13	
APPROVED			
SIZE	PART NO.	REV.	
X	BB16-S-12-RA-SG	-	
REF: S00070T	SCALE: NTS	SHEET 1 OF 1	