

6

5

4

3


2

1


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/19/18	

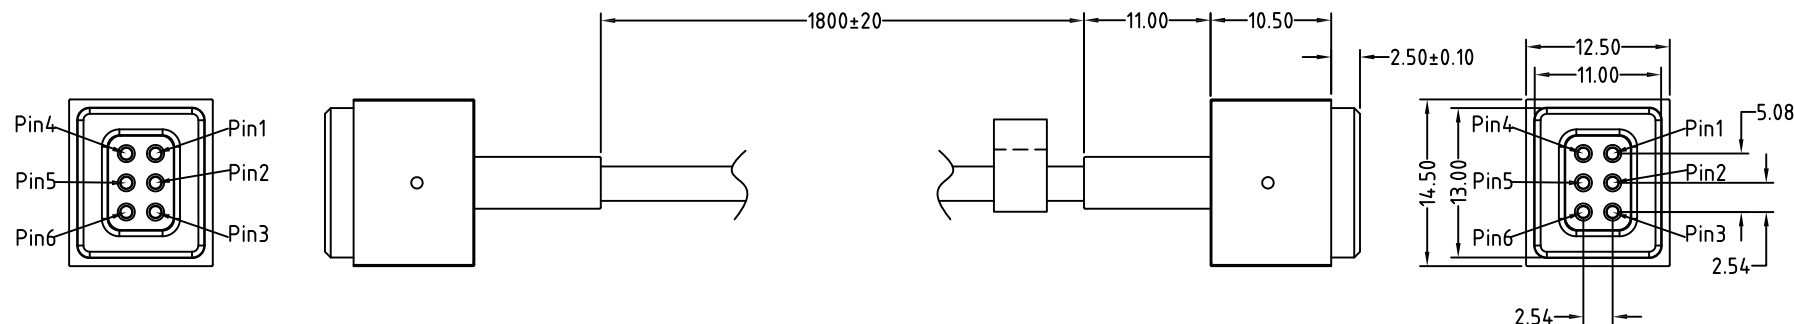

CONN→CONN					
Pin1.Pin6	Vcc	Pin1.Pin6			
Pin3.Pin4	GND	Pin3.Pin4			

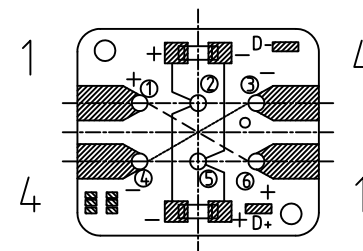

SPECIFICATIONS:

Electrical:

Rated Current & Voltage: 12VDC, 3A

Contact resistance: 50 mohms max

Mechanical:

Contact force: 70±20g @ 1.0mm working stroke

Durability: 20,000 Cycles

Electrical Test:

All Assemblies must be 100% Tested for Shorts, Open, Continuity, and Physical Appearance.

Environmental:

Lead free, RoHS compliant.



MATING PART: PH2-C25410-06-FVP

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED Millimeters HOLES .X ± .25 .XX ± .15 Ø.XX ± .15 .XXX ± .05					
APPROVALS			TITLE		
DATE			2.54MM PITCH POGO PIN CABLE, MALE, 2X3P		
DRAWN	HR	9/19/18			
CHECKED	CK	9/19/18			
APPROVED					
			SIZE X	PART NO. CA-ST6-PH2-254105-M	REV -
			REF: S00170C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1