
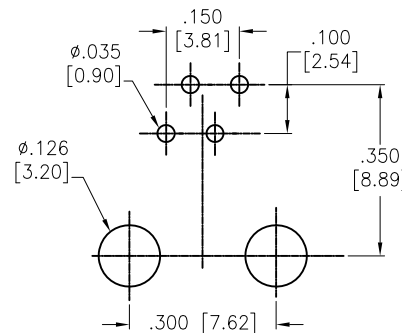
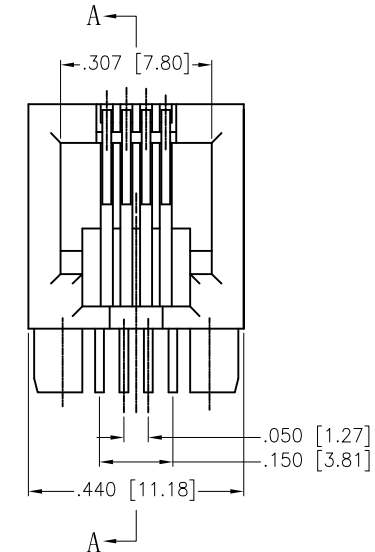
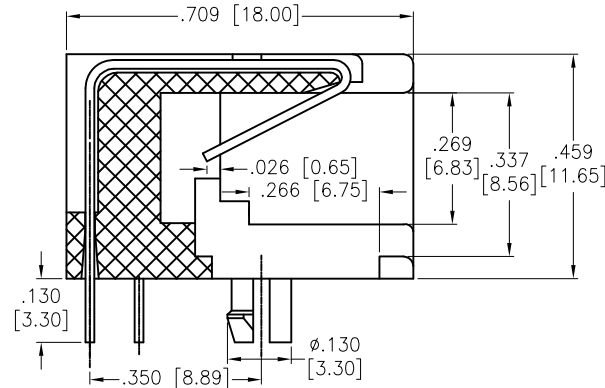


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	03/21/05	
A		REVISED DIM.	3/05/09	
B		UPDATE DRAWING	6/18/26	LH/MC



RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Hi-Temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Round contact

Xu" Gold over Nickel underplate overall

Electrical:

Voltage rating: 125V AC RMS

Current rating: 1.5 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000V AC or 1500V DC for 1 Minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

.X	± .10	Ø.X	± .10
INCHES .XX	± .020	HOLES Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

DRAWN

SS

03/21/05

CHECKED

APPROVED

CONFIDENTIAL AND PROPRIETARY
© Adam Tech. All rights reserved. This document contains confidential and proprietary information belonging to Adam Tech. It is provided solely for design and reference purposes by authorized parties. Any reproduction, distribution, display, or disclosure to third parties, in whole or in part, without the prior written consent of Adam Tech, is strictly prohibited. Adam Tech retains all rights, including copyright, trademark, trade secret, and all other intellectual property rights worldwide.



TITLE
MODULAR TELEPHONE JACK, 4P4C
RIGHT ANGLE, PCB, HI-TEMP

SIZE X	PART NO. MTJ-445X1-HT	REV. B
-----------	--------------------------	-----------

REF: S00005C	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------