


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/15/19	
A		UPDATE DRAWING	7/5/19	AY/AY1

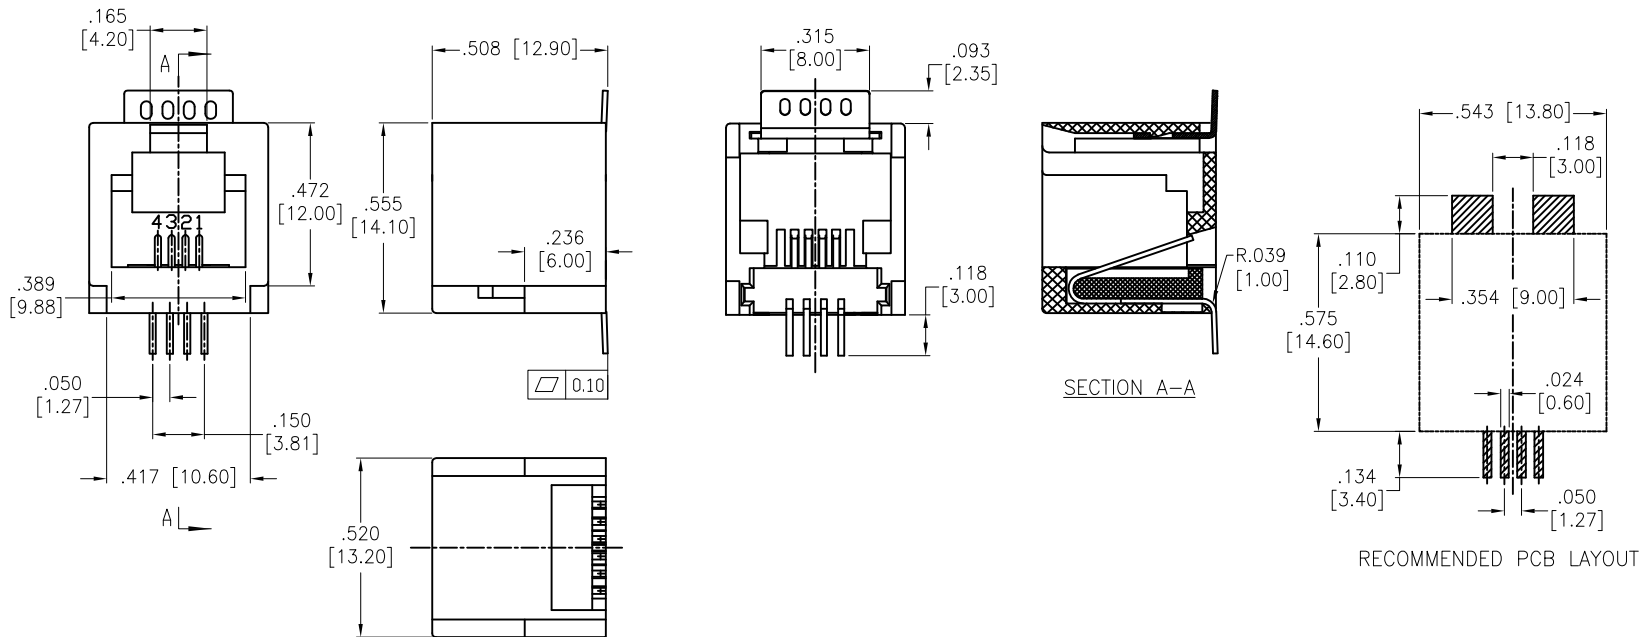

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold Flash over Nickel underplate on contact area

Tin over Nickel underplate on solder tails

Electrical:

Voltage rating: 150 VAC RMS

Current rating: 1.5 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min @ 500 VDC

Contact to Contact: 1,000 VDC or AC Peak for 1 minute

Contact to Shield: 1,500 VDC or AC Peak for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010



TITLE: MODULAR TELEPHONE JACK, 6P4C,
 SMT, TOP ENTRY

APPROVALS		DATE
DRAWN	LH	5/15/19
CHECKED	AY1	5/15/19
APPROVED		

SIZE	PART NO.	REV.
X	MTJ-64HX1-B	A
REF: S00005C	SCALE: NTS	SHEET 1 OF 1