
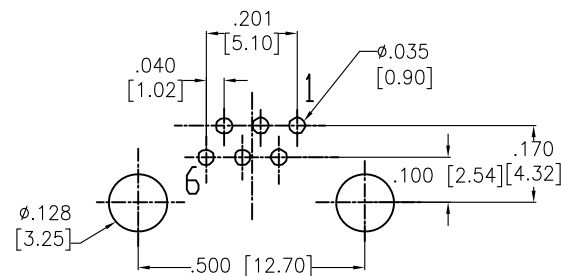
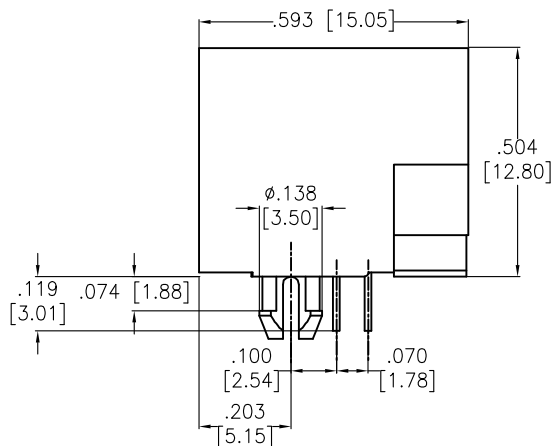



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/15/14	
A		UPDATE SPEC.	1/19/18	AY/LW

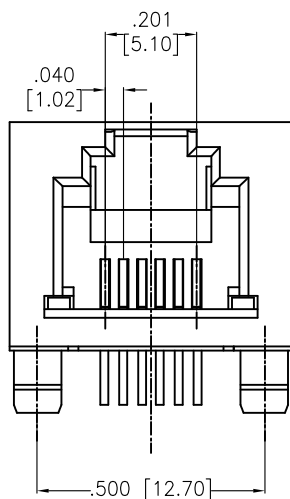

RECOMMENDED PCB LAYOUT

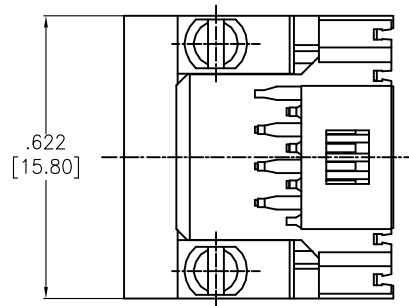

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Red, Pantone color P485C

Contacts: Phosphor Bronze

Contacts Plating:

Round contact

Gold over Nickel underplate overall

Flat contact

Gold over Nickel underplate on contact area,

Tin over Nickel underplate on solder tails

Electrical:

Voltage rating: 125V AC rms.

Current rating: 1.5 Amps.

Contact resistance: 20 Mohms max.

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage:

Contact to Contact: 1,000 VAC rms

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	4/15/14
CHECKED	LW	4/15/14
APPROVED		



TITLE
MODULAR TELEPHONE JACK, 6P6C
RJ11, SIDE ENTRY, RED

SIZE	PART NO.	REV.
X	MTJ-66ARX1-A-P485C	A
REF:	S00005C	SCALE: NTS
SHEET 1 OF 1		