
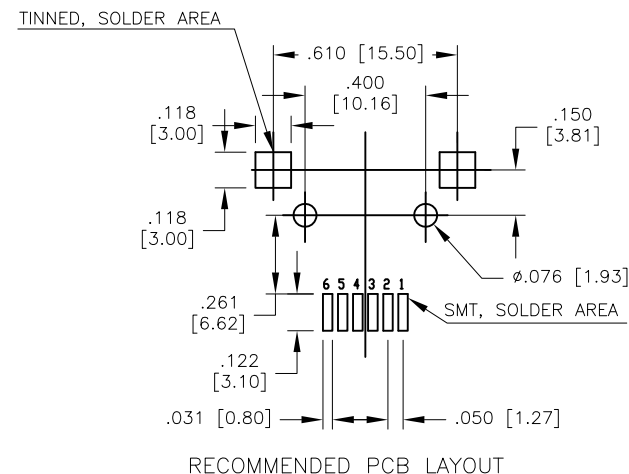
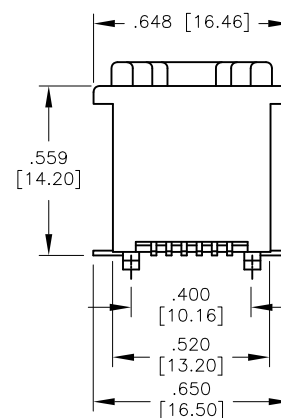
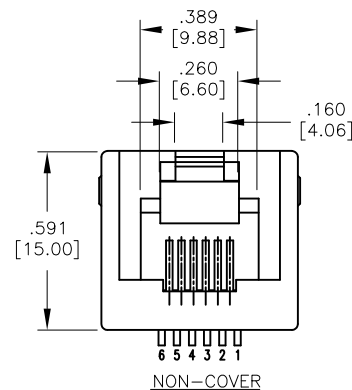


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/7/11	
A		UPDATED DRAWING	10/31/18	HR/LW

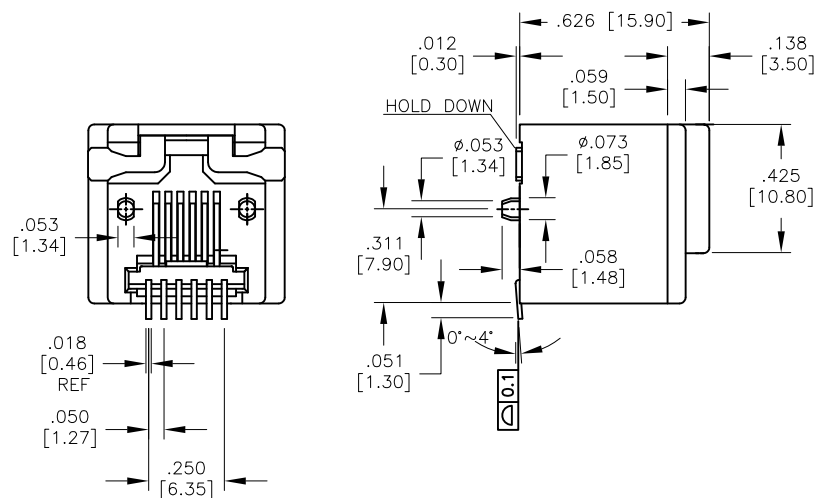

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Hold Down: Copper Alloy, Tin plated

Plating:

Gold over Nickel underplate on contact area

Gold flash over Nickel underplate on solder tails

Electrical:

Voltage rating: 150 VAC max

Current rating: 1.5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 Vrms for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS DATE

DRAWN AY 12/7/11

CHECKED SC 12/7/11

APPROVED



TITLE MODULAR TELEPHONE JACK, 6P6C, R/A,
SMT TYPE

SIZE X PART NO. MTJ-66VX1-SMT REV. A

REF: S00065T SCALE: NTS SHEET 1 OF 1