


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	7129	RELEASED	12/13/06	
A		REDRAWN	12/3/12	
B		UPDATE SPEC.	6/20/19	LH/TW



SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Contact Plating:
Gold over Nickel underplate on contact area
Gold flash over Nickel underplate on solder tails
Electrical:
Voltage Rating: 150 VAC max
Current rating: 1.5 Amps max
Contact Resistance: 20 mohms max.
Insulation resistance: 500 Mohms min @500 VDC
Dielectric withstanding voltage: 1000 Vrms for 1 minut
Temperature Rating:
Operating temperature: -40°C to +85°C
Environmental:
Lead free, RoHS compliant.

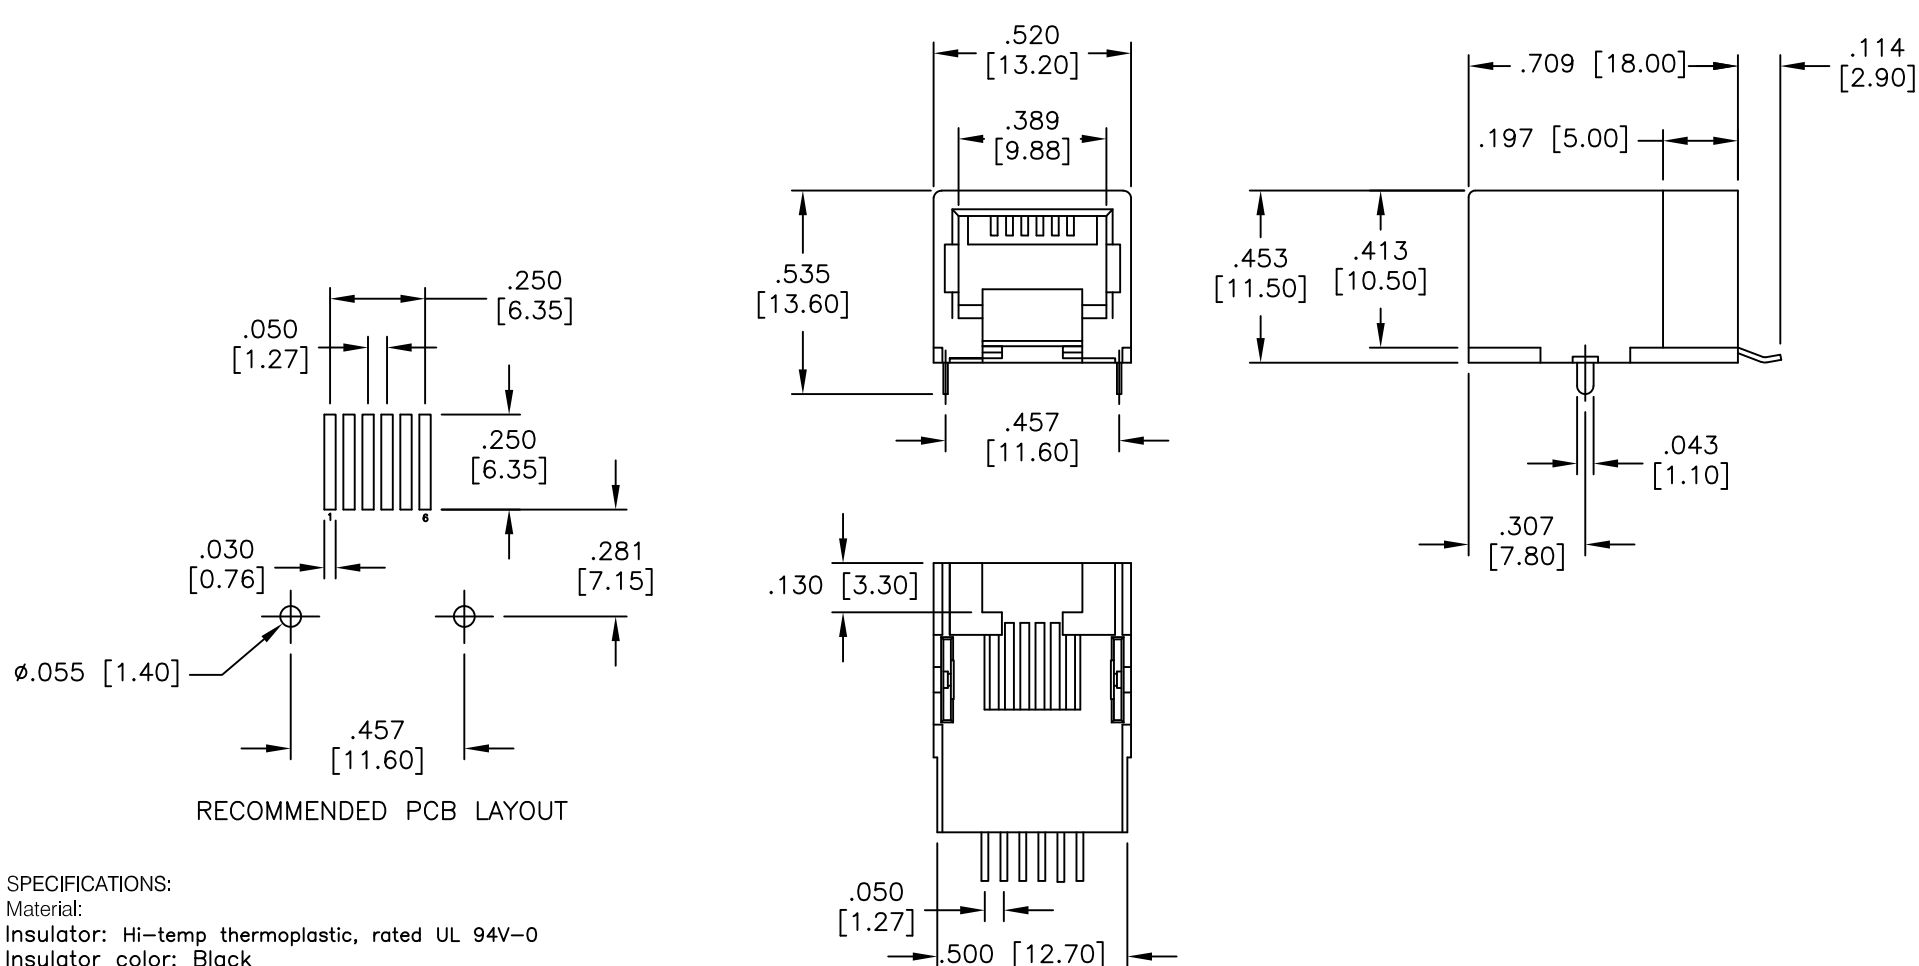

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES HOLES			
.X ± .10	Ø.X ± .10	TITLE TELEPHONE JACK, SMT, SIDE ENTRY, 6P6C	
.XX ± .020	Ø.XX ± .015	SIZE X	PART NO. MTJ-66YX1
.XXX ± .015	Ø.XXX ± .010	REF: S00065T	SCALE: NTS
APPROVALS		DATE 12/13/06	
DRAWN	BW	REV. B	
CHECKED		SHEET 1 OF 1	
APPROVED			