


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/16	
A		UPDATED SPEC.	6/20/16	HR/CK

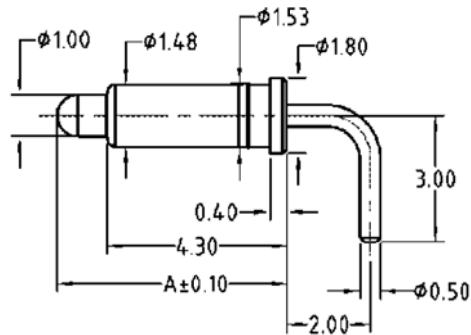

ADAM P/N	Initial Height
PH-MHP-4355	5.5mm
PH-MHP-4360	6.0mm

Working Stroke	Spring Force
1.0mm	70g

Rated Current	Rated Voltage
3A Max	12V

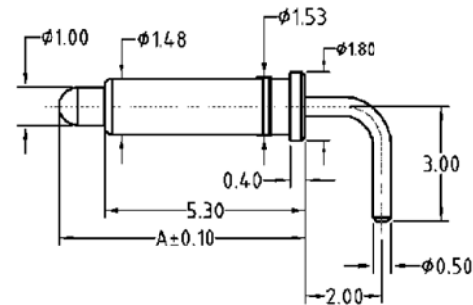

ADAM P/N	Initial Height
PH-MHP-5365	6.5mm
PH-MHP-5370	7.0mm
PH-MHP-5375	7.5mm
PH-MHP-5380	8.0mm

Working Stroke	Spring Force
1.0mm	70g

Rated Current	Rated Voltage
3A Max	12V

SPECIFICATIONS:

Material:

Plunger: Brass, Gold plated

Barrel: Brass, Gold plated

Spring: SUS Surface treatment

Electrical:

Contact resistance: 20 mohms max

Mechanical:

Full Stroke: 1.40mm

Durability: 1,000,000 Cycles

Temperature Rating:

Operating temperature: -55°C to +125°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
HOLES

.X	± .25	
.XX	± .15	Ø.XX ± .013
.XXX	± .05	

APPROVALS		DATE
DRAWN	HR	3/30/16
CHECKED	CK	3/30/16
APPROVED		



TITLE

DIP SPRING LOADED PIN, RIGHT ANGLE

SIZE	PART NO.	REV.
X	PH-MHP-XXXX	A
REF: S00170C		SCALE: NTS
		SHEET 1 OF 1