


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/19	

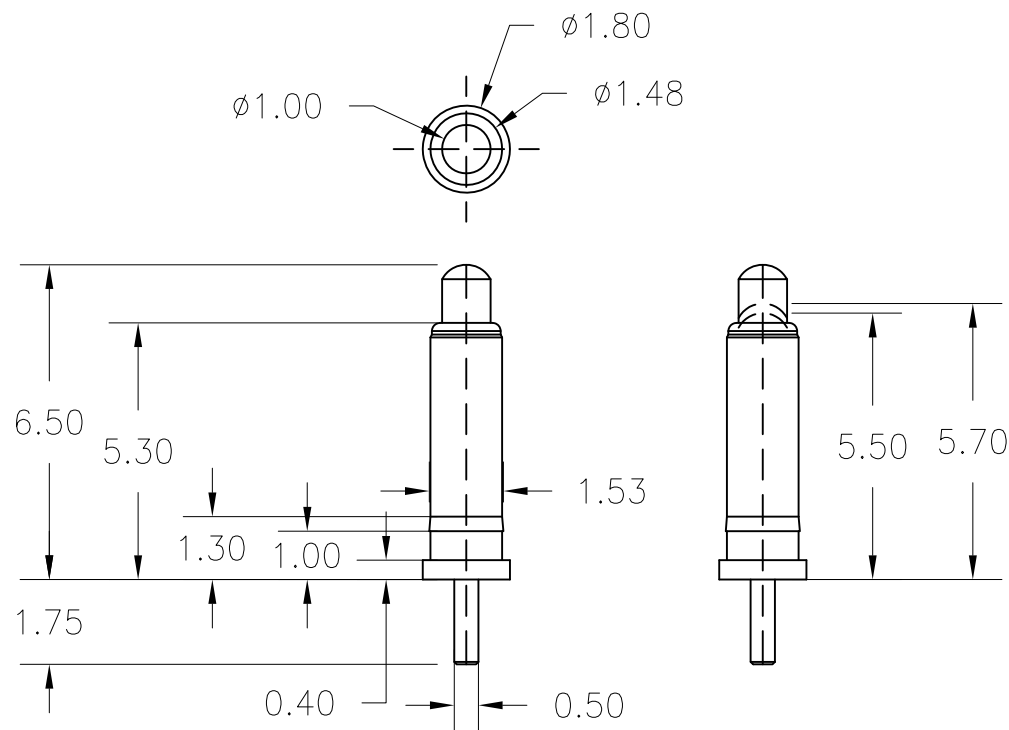

SPECIFICATIONS:

Material:

Contact: Brass, 5u" Gold plated over Nickel

Spring: SUS

Electrical:

Rated Voltage (per Contact): 12 Volts

Rated Current (per Contact): 3 A max

Mechanical:

Working Stroke & Force (per Contact) : 50±20gf (Stroke 1)
 80±20gf (Stroke 2)

Durability: 30,000 Cycles min

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MILLIMETERS
 TOLERANCES: EXCEPT AS NOTED
 MM ANGLE
 ±.15 ±2°



TITLE

PCB DIP SPRING LOADED PIN, STRAIGHT

APPROVALS		DATE
DRAWN	HR	1/11/19
CHECKED	TW	1/11/19
APPROVED		

SIZE	PART NO.	REV.
X	PH-MVP-5365-C1	-
REF: S00185C	SCALE: NTS	SHEET 1 OF 1