


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/16	
A		UPDATED SPEC.	6/20/16	HR/CK

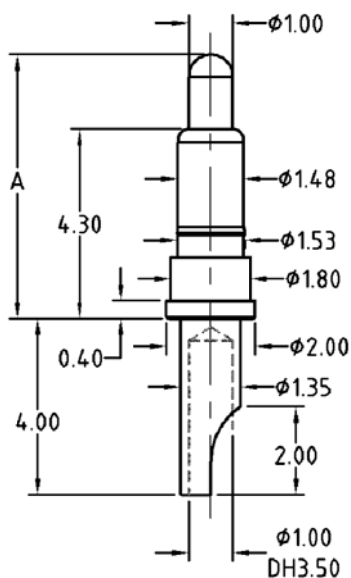

ADAM P/N	Initial Height
PH-MVS-4355-C1	5.5mm
PH-MVS-4360-C1	6.0mm

Working Stroke	Spring Force
1.0mm	70g

Rated Current	Rated Voltage
3A Max	12V

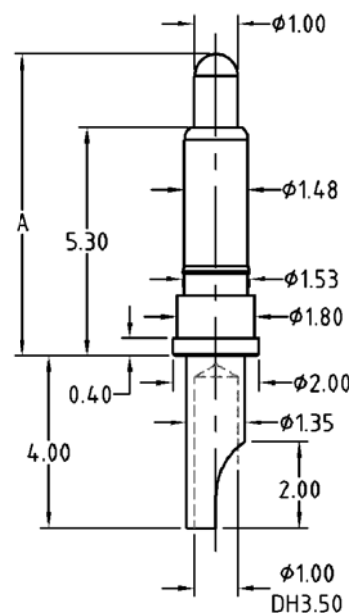

ADAM P/N	Initial Height
PH-MVS-5365-C1	6.5mm
PH-MVS-5370-C1	7.0mm
PH-MVS-5375-C1	7.5mm
PH-MVS-5380-C1	8.0mm

Working Stroke	Spring Force
1.0mm	70g

Rated Current	Rated Voltage
3A Max	12V

SPECIFICATIONS:

Material:

Plunger: Brass, Gold plated

Barrel: Brass, Gold plated

Spring: SUS Surface treatment

Electrical:

Contact resistance: 20 mohms max

Mechanical:

Full Stroke: 1.40mm

Durability: 100,000 to 1,000,000 Cycles

Temperature Rating:

Operating temperature: -55°C to $+125^{\circ}\text{C}$

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM HOLES

.X	± .25		
.XX	± .15	Ø.XX	±.15
.XXX	± .05		

APPROVALS		DATE
DRAWN	HR	3/30/16
CHECKED	CK	3/30/16
APPROVED		



TITLE

SOLDER CUP SPRING LOADED PIN, STRAIGHT

SIZE X	PART NO. PH-MVS-XXXX-C1	REV. A
REF: S00170C	SCALE: NTS	SHEET 1 OF 1