


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/16	
A		UPDATED SPEC.	6/20/16	HR/CK

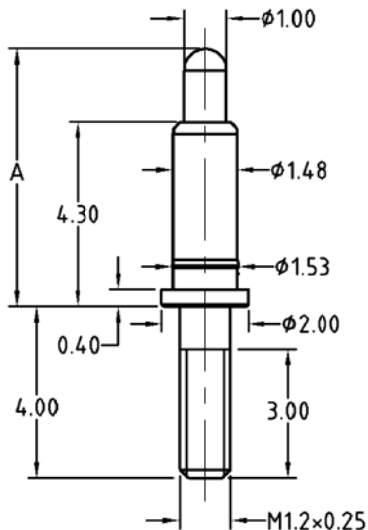

ADAM P/N	Initial Height
PH-MVT-4355	5.5mm
PH-MVT-4360	6.0mm

Working Stroke	Spring Force
1.0mm	70g

Rated Current	Rated Voltage
3A Max	12V

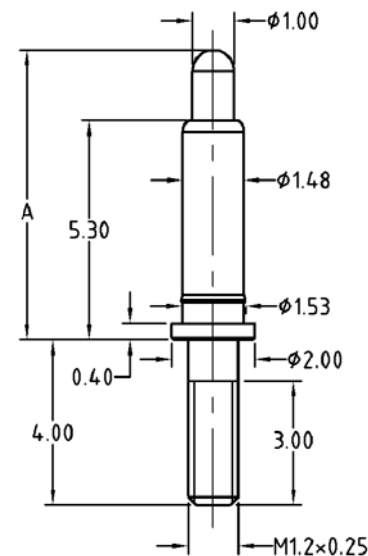

ADAM P/N	Initial Height
PH-MVT-5365	6.5mm
PH-MVT-5370	7.0mm
PH-MVT-5375	7.5mm
PH-MVT-5380	8.0mm

Working Stroke	Spring Force
1.0mm	70g

Rated Current	Rated Voltage
3A Max	12V

SPECIFICATIONS:

Material:

Plunger: Brass, Gold plated

Barrel: Brass, Gold plated

Spring: SUS Surface treatment

Electrical:

Contact resistance: 20 mohms max

Mechanical:

Full Stroke: 1.40mm

Durability: 1,000,000 Cycles

Temperature Rating:

Operating temperature: -55°C to +125°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
HOLES
MM

.X ± .25
.XX ± .15
.XXX ± .05

Ø.XX ± .013

APPROVALS		DATE
DRAWN	HR	3/30/16
CHECKED	CK	3/30/16
APPROVED		



TITLE

SCREW THREAD SPRING LOADED PIN, STRAIGHT

SIZE	PART NO.	REV.
X	PH-MVT-XXXX	A
REF:	S00170C	SCALE: NTS
SHEET 1 OF 1		