

6

5

4

3







2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/25/16	

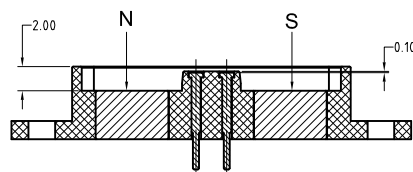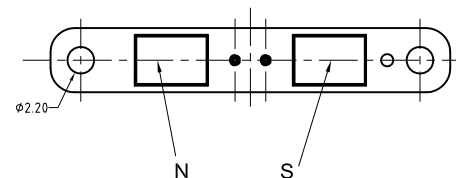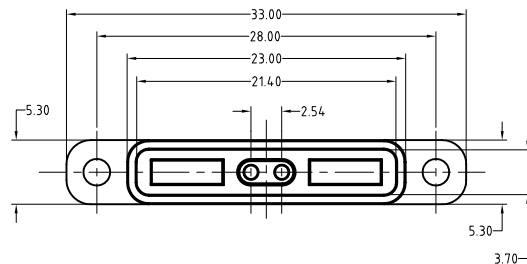

SPECIFICATIONS:

Material:

Insulator: HTN, rated UL 94V-0

Insulator color: Black

Contact: Pogo pin, 5u" Gold plated

Magnet: N52 NdFeB, Ni-Cu-Ni plated

Electrical:

Rating Current & Voltage rating: 12VDC, 3A

Contact resistance: 50 mohms max

Environmental:

Lead free, RoHS compliant.



Mating with: CA-USBAM-PH-3E02-MVCC

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
HOLES

.X ± .25
.XX ± .15
.XXX ± .05

Ø.XX ± .15

APPROVALS		DATE
DRAWN	HR	8/25/16
CHECKED	CK	8/25/16
APPROVED		



TITLE 2.54MM PITCH POGO PIN, FEMALE, 2P
SINGLE ROW, MAGNET, STRAIGHT

SIZE X	PART NO. PH1-3E-02-FVMP-6085	REV. -
REF: S00170C	SCALE: NTS	SHEET 1 OF 1