





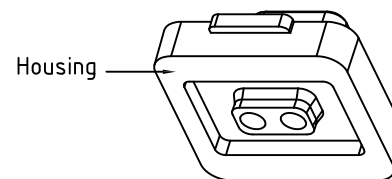
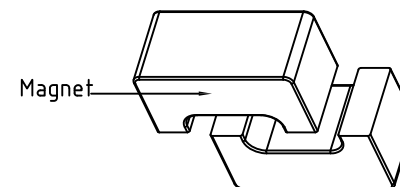
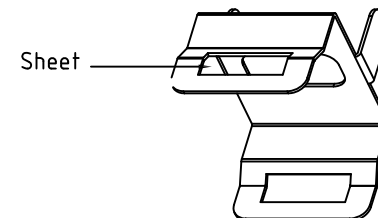


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/18/18	
A		UPDATE SPEC.	10/23/19	AY/KC



Mating with: CA-ST2-PH1-25410-M
CA #AN15172-X

SPECIFICATIONS:

Material:

Housing: Hi-Temp Thermoplastic, rated UL 94V-0

Contact: Brass, 10u" Gold plated over Nickel

Magnet: N48, Nickel plated

Sheet: Stainless Steel

Electrical:

Rating Current & Voltage (Per Contact): DC12V, 1A

Contact resistance: 50 mohms max

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
Millimeters ANGEL
30-150 ± 0.15
6-30 ± 0.10
0-6 ± 0.05

APPROVALS		DATE
DRAWN	HR	10/18/18
CHECKED	CK	10/18/18
APPROVED		



TITLE
POGO PIN CONNECTOR, 2.54MM PITCH
FEMALE, 2P, STRAIGHT

SIZE X	PART NO. PH1-3F-02-FVMP-6910	REV. A
REF: S00170C	SCALE: NTS	SHEET 1 OF 1