

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED

7/10/18

D

D

C


C

B

B

A

A

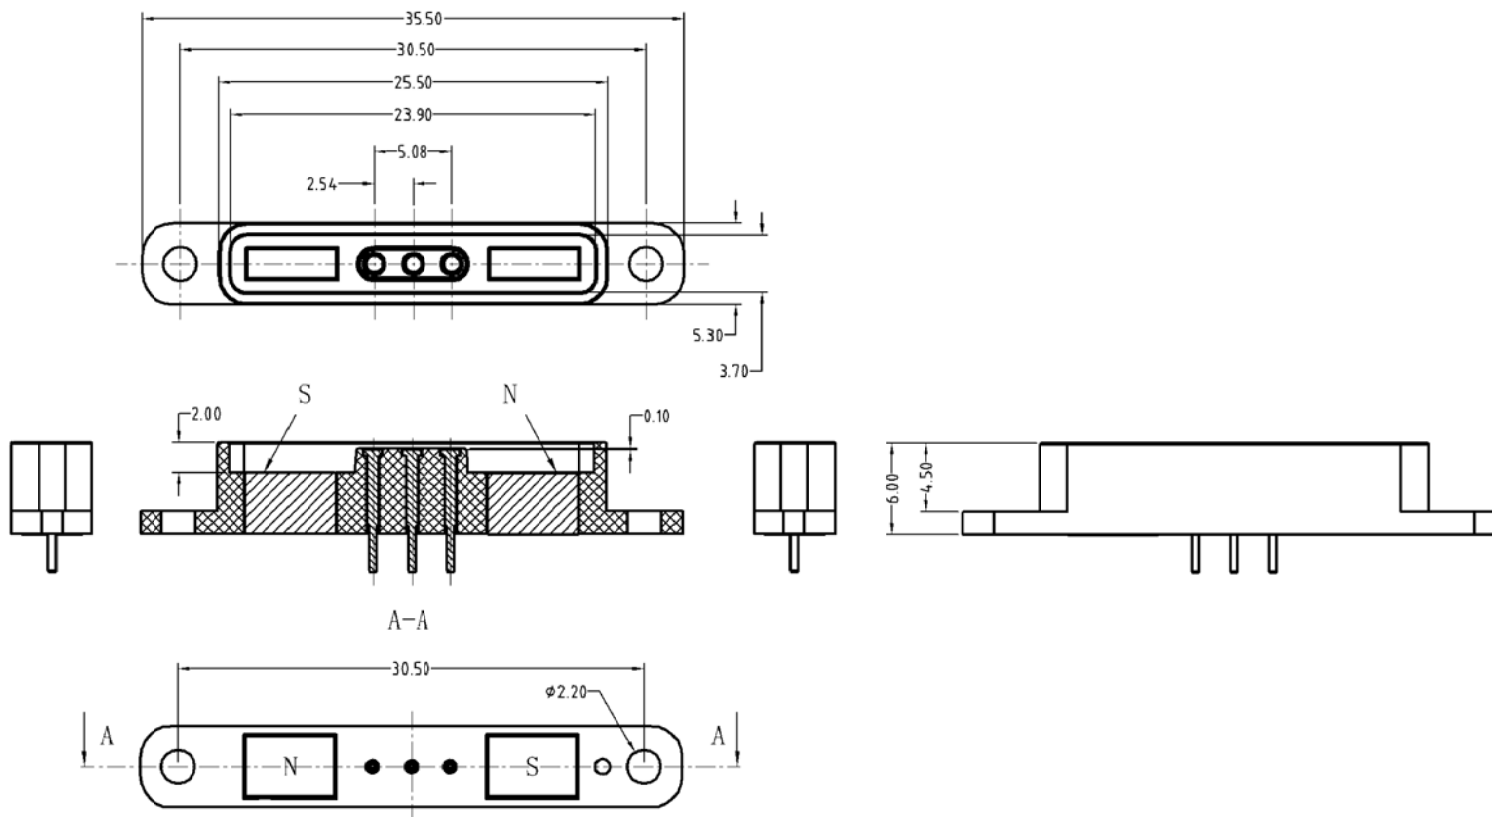

SPECIFICATIONS:

Material:

Insulator: HTN, rated UL 94V-0

Insulator color: Black

Contact: Pogo pin, 5u" Gold plated

Magnet: N52 NdFeB, Ni-Cu-Ni plated

Electrical:

Rating Current & Voltage rating: 12VDC, 3A

Contact resistance: 50 mohms max

Environmental:

Lead free, RoHS compliant.



Mating with: CA-RA3-PH1-25D5-M

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
ANGLE
MM
0~6 ± 0.10
6~30 ± 0.20
30~150 ± 0.30

APPROVALS

DATE

DRAWN

HR

7/10/18

CHECKED

LW

7/10/18

APPROVED



TITLE 2.54MM PITCH POGO PIN, FEMALE, 3P
SINGLE ROW, MAGNET, STRAIGHT

SIZE

PART NO.

PH1-3L-03-FVMP-4560

REV.

-

REF: S00170C

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1