
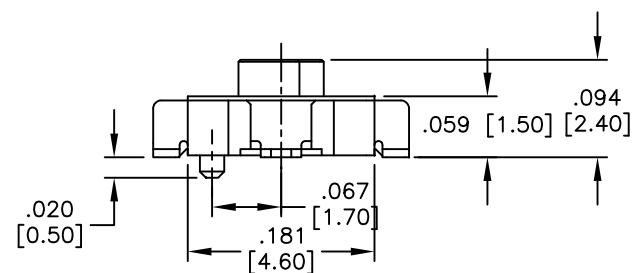
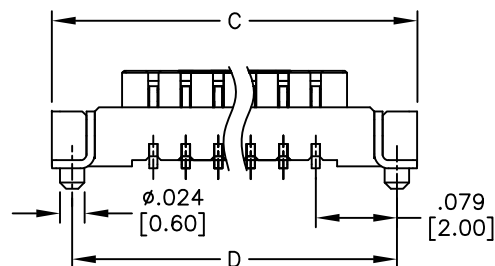
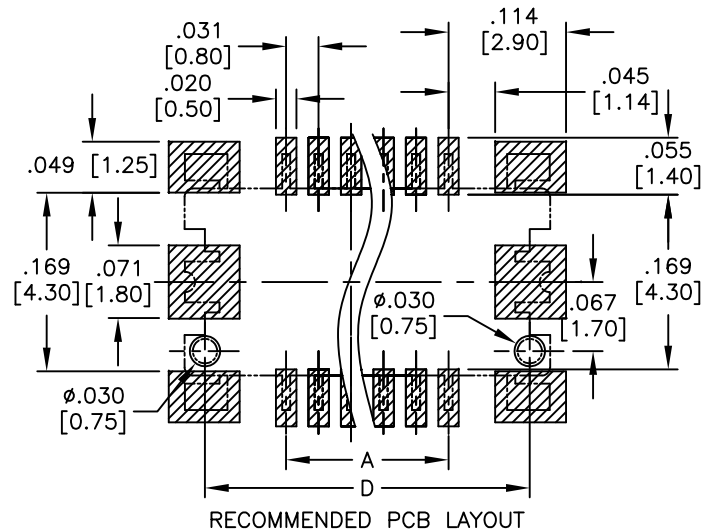


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/03/10	

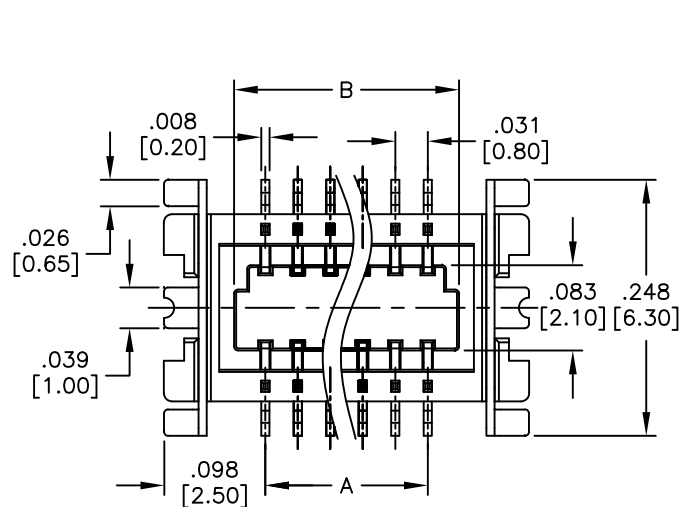

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Natural
Contacts: Copper Alloy
Hold down: Copper Alloy
Plating:
Gold flash over Nickel underplate overall.
Electrical:

Operating voltage: 50 VAC max
Current rating: 0.5 Amps max
Contact resistance: 30 mohms max. initial
Insulation resistance: 500 Mohms min

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



Positions: 10 thru 30

A = .031 [0.80] x (No. of Contacts per row - 1)

B = .031 [0.80] x (No. of Contacts per row - 1) + .061 [1.54]

C = .031 [0.80] x (No. of Contacts per row - 1) + .197 [5.00]

D = .031 [0.80] x (No. of Contacts per row - 1) + .157 [4.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS DATE

DRAWN	DY	12/03/10
CHECKED		
APPROVED		



TITLE
.031 [0.80] BOARD TO BOARD SOCKET, SMT TYPE
2.40MM HEIGHT, STACKING HEIGHT=3.5MM, 4.2MM

SIZE X	PART NO. BB8-SEA-XX-G-2.40-T/R	REV. -
REF: S00128T	SCALE: NTS	SHEET 1 OF 1