

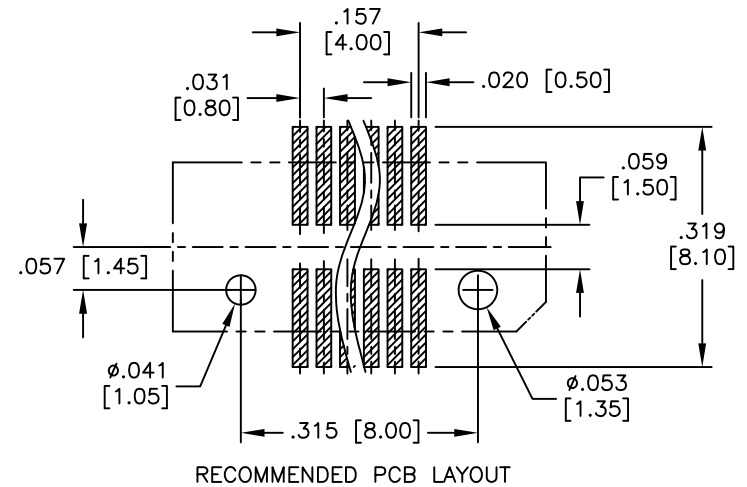
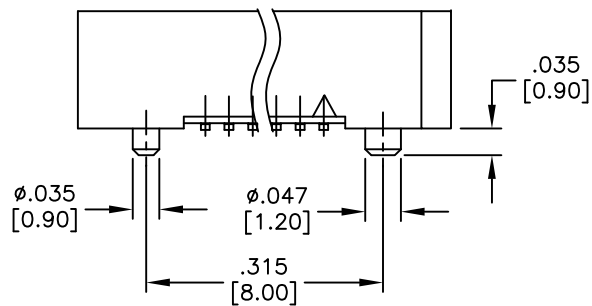


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/03/10	

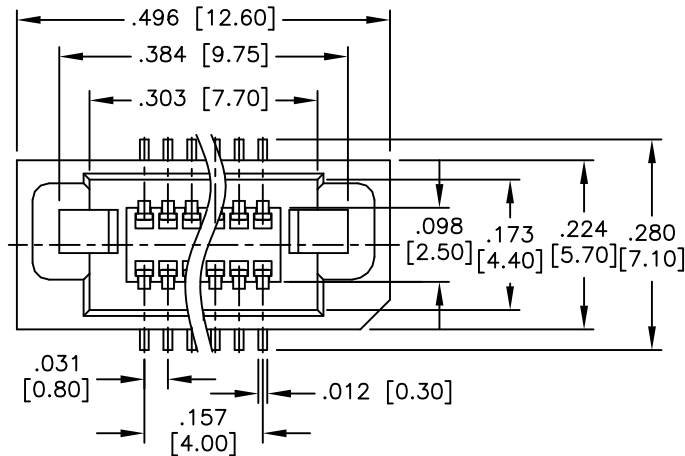

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Natural
Contacts: Copper Alloy
Hold down: Copper Alloy
Plating:
Gold flash over Nickel underplate overall.
Electrical:
Operating voltage: 100VAC, 300VDC r.m.s
Current rating: 0.5 Amps max
Contact resistance: 60 mohms max. initial
Insulation resistance: 500 Mohms min
Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES		IETABEE	
.X ± .10	Ø.X ± .10	TITLE .031 [0.80] BOARD TO BOARD SOCKET, SMT TYPE 4.00MM HEIGHT STACKING HEIGHT=6.95MM	
.XX ± .020	Ø.XX ± .015	SIZE X	PART NO. BB8-SEC-12-G-4.00-T/R
.XXX ± .015	Ø.XXX ± .010	REF: S00128T	SCALE: NTS
APPROVALS		DATE	
DRAWN	DY	12/03/10	
CHECKED			
APPROVED			
		REV. -	SHEET 1 OF 1