

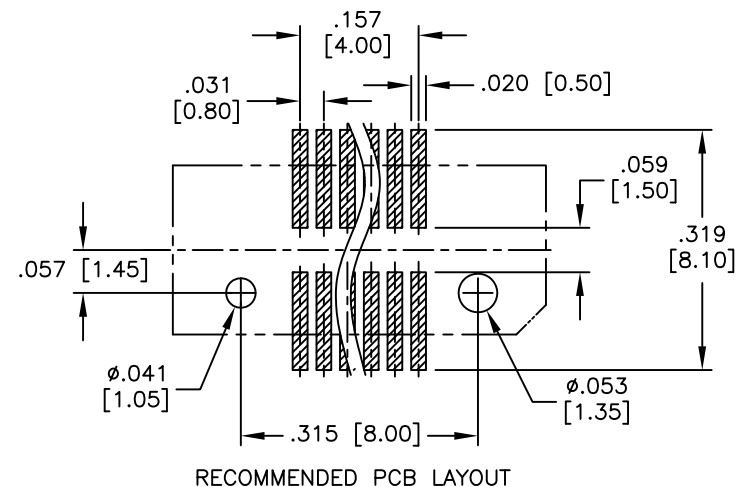
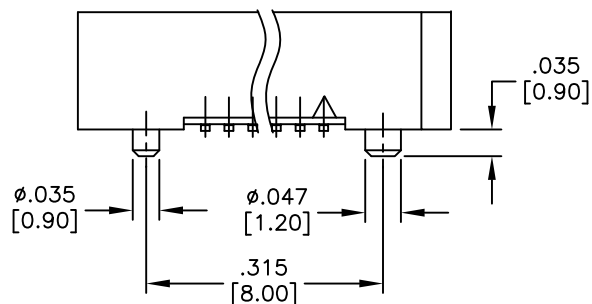


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/03/10	

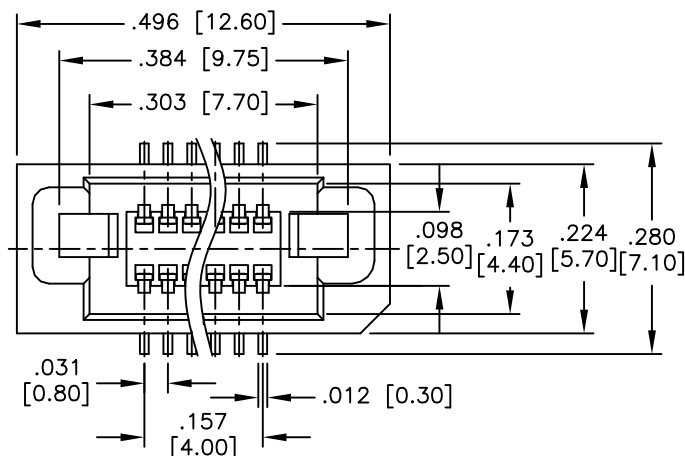

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Copper Alloy
 Hold down: Copper Alloy
 Plating:
 Gold flash over Nickel underplate overall.
 Electrical:
 Operating voltage: 100VAC, 300VDC r.m.s
 Current rating: 0.5 Amps max
 Contact resistance: 60 mohms max. initial
 Insulation resistance: 500 Mohms min
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES			
.X ± .10	Ø.X ±.10		
.XX ± .020	Ø.XX ±.015		
.XXX ± .015	Ø.XXX ±.010	TITLE	
APPROVALS		.031 [0.80] BOARD TO BOARD SOCKET, SMT TYPE	
DRAWN		4.00MM HEIGHT STACKING HEIGHT=6.95MM	
DY		DATE	
12/03/10		SIZE	
CHECKED		PART NO.	
APPROVED		BB8-SEC-12-G-4.00-T/R	
		REV	
		-	
REF: S00128T		SCALE: NTS	
		SHEET 1 OF 1	